

FACTORY AUTOMATION

# NUMERICAL CONTROL (CNC) C80 Series





Our Factory Automation business is focused on "Automating the World" to make it a better, more sustainable environment supporting manufacturing and society, celebrating diversity and contributing towards an active and fulfilling role.

Mitsubishi Electric is involved in many areas including the following:

**Energy and Electric Systems**

A wide range of power and electrical products from generators to large-scale displays.

**Electronic Devices**

A wide portfolio of cutting-edge semiconductor devices for systems and products.

**Home Appliance**

Dependable consumer products like air conditioners and home entertainment systems.

**Information and Communication Systems**

Commercial and consumer-centric equipment, products and systems.

**Industrial Automation Systems**

Maximizing productivity and efficiency with cutting-edge automation technology.



The Mitsubishi Electric Group is actively solving social issues, such as decarbonization and labor shortages, by providing production sites with energy-saving equipment and solutions that utilize automation systems, thereby helping towards a sustainable society.

# OVERVIEW

FUTURE OF MITSUBISHI ELECTRIC CNC	03
CONCEPT OF C80 SERIES	05
CNC SYSTEM CONFIGURATIONS	07
PRODUCTIVITY	09
EXPANDABILITY	11
USABILITY	13
MAINTENANCE	15
SAFETY	16
SOFTWARE TOOLS	17
DRIVE SYSTEM	19
LIST OF COMPONENTS	21
INSTALLATION ENVIRONMENT CONDITIONS / LIST OF MANUALS	24
CASE STUDY	25
FUNCTIONAL SPECIFICATIONS	26
GLOBAL SALES & SERVICE NETWORK	29
WARRANTY	33

1
2
3
4
5
6
7
8
9
10
11
12
13

# *The Difference in your Machining*

with MITSUBISHI ELECTRIC CNC



## Towards a CNC that can create more Differences

By staying close to our customers, we gain a deep understanding of their commitment to manufacturing and their unique "Difference", including their identity.

We will continuously integrate our refined automation technology, extensive experience with machine tools, and comprehensive technical capabilities as a general electrical equipment manufacturer.

This integration aims to enhance and strengthen our customers' "Difference".

We remain committed to promoting a sustainable society by addressing various social issues through our customers' manufacturing operations.



Revolutionary, next-generation CNC opens  
a new era of production lines through  
compatibility with MELSEC iQ-R Series

# C80 Series

Advanced technologies delivered by the breakthrough performance of our CNC-dedicated CPU.  
Reliable MELSEC quality accumulated in various industrial scenes.  
In addition, the CNC C80 Series can be expanded and updated over time.

Five features ( productivity, expandability, usability, maintenance and safety )  
empower manufacturing lines with infinite possibilities and innovative values  
in terms of advancement, reliability and growth.



## Productivity

C80 improves productivity through its  
advanced performance and functionality.



## Expandability

C80 allows flexible system configuration to  
catch up with the MELSEC evolution.



## Usability

C80 provides unprecedented  
user-friendliness.



## Maintenance

Low maintenance reduces downtime  
and maintenance costs.




## Safety

Easily implement a plethora of safety  
measures compliant with global standards.

# Infinite Possibilities




# CNC SYSTEM CONFIGURATIONS

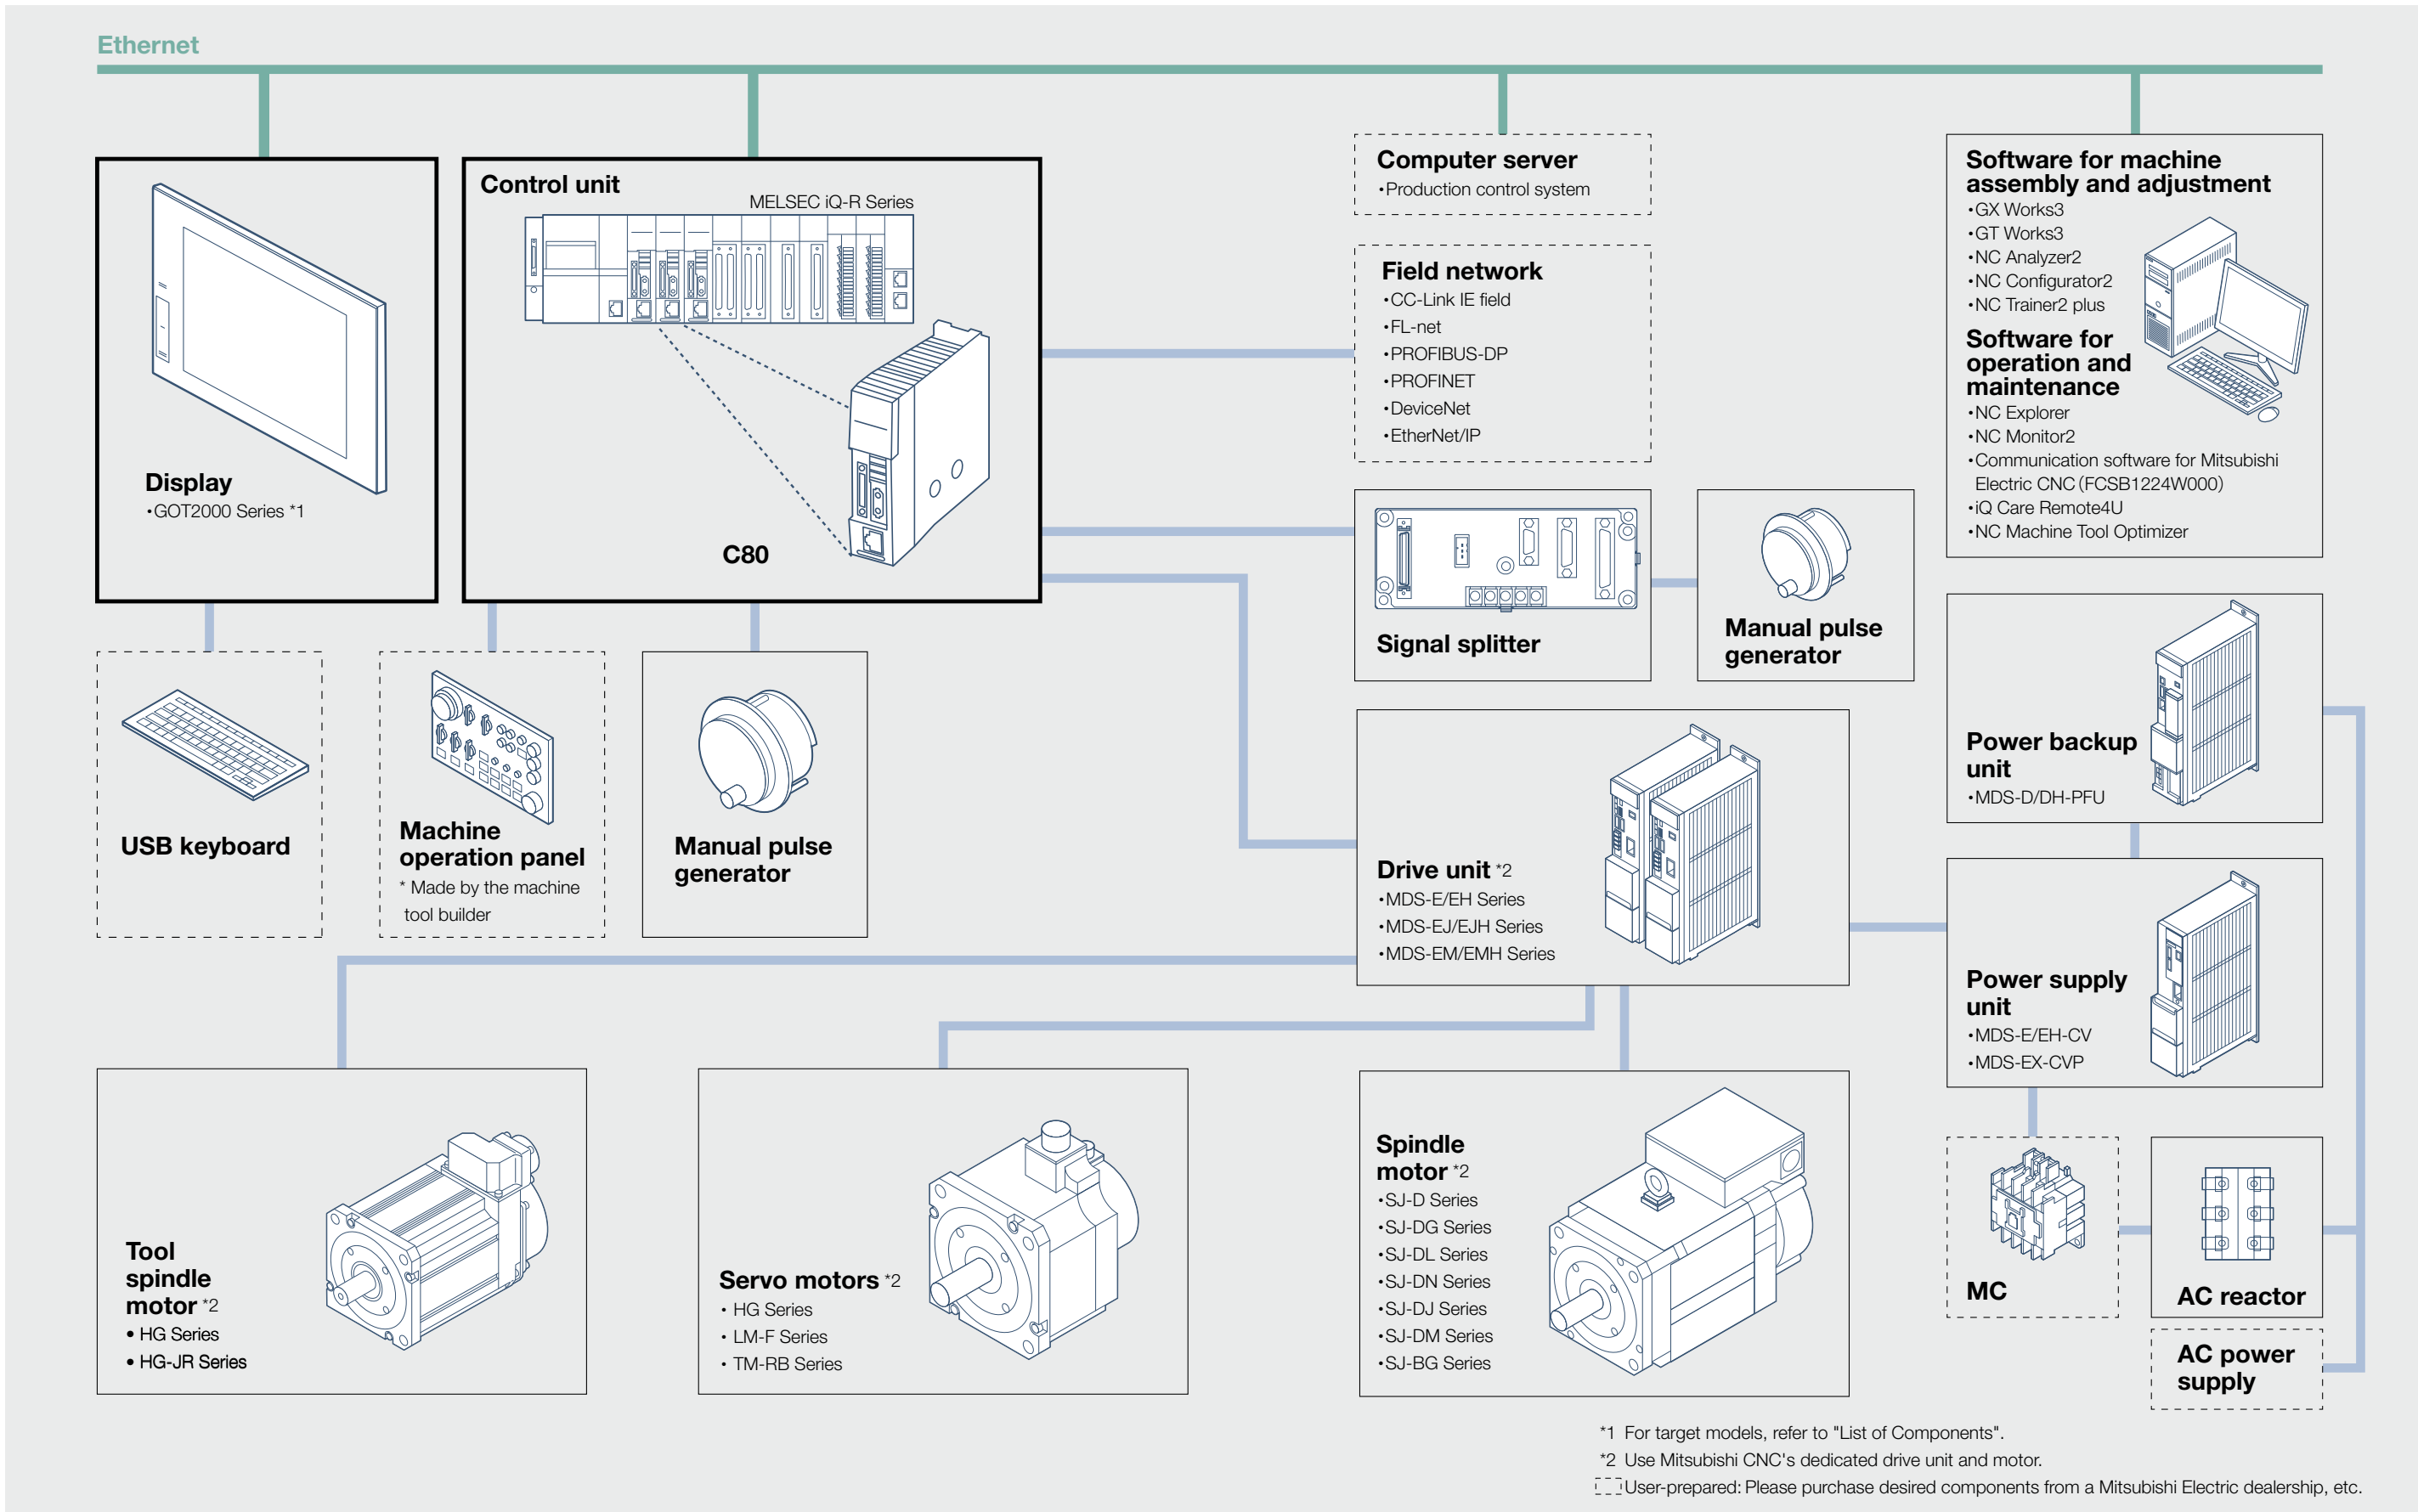



# PRODUCTIVITY

Mitsubishi Electric's original CNC-dedicated CPU provides a major leap in basic performance. A newly developed high-speed system bus approximately 40 times faster than our conventional product provides high-speed, large-capacity data communication. CNC control functions and drive units have been improved, enabling high-speed, highly accurate machining. The C80 Series contributes to reducing cycle time and increasing productivity.

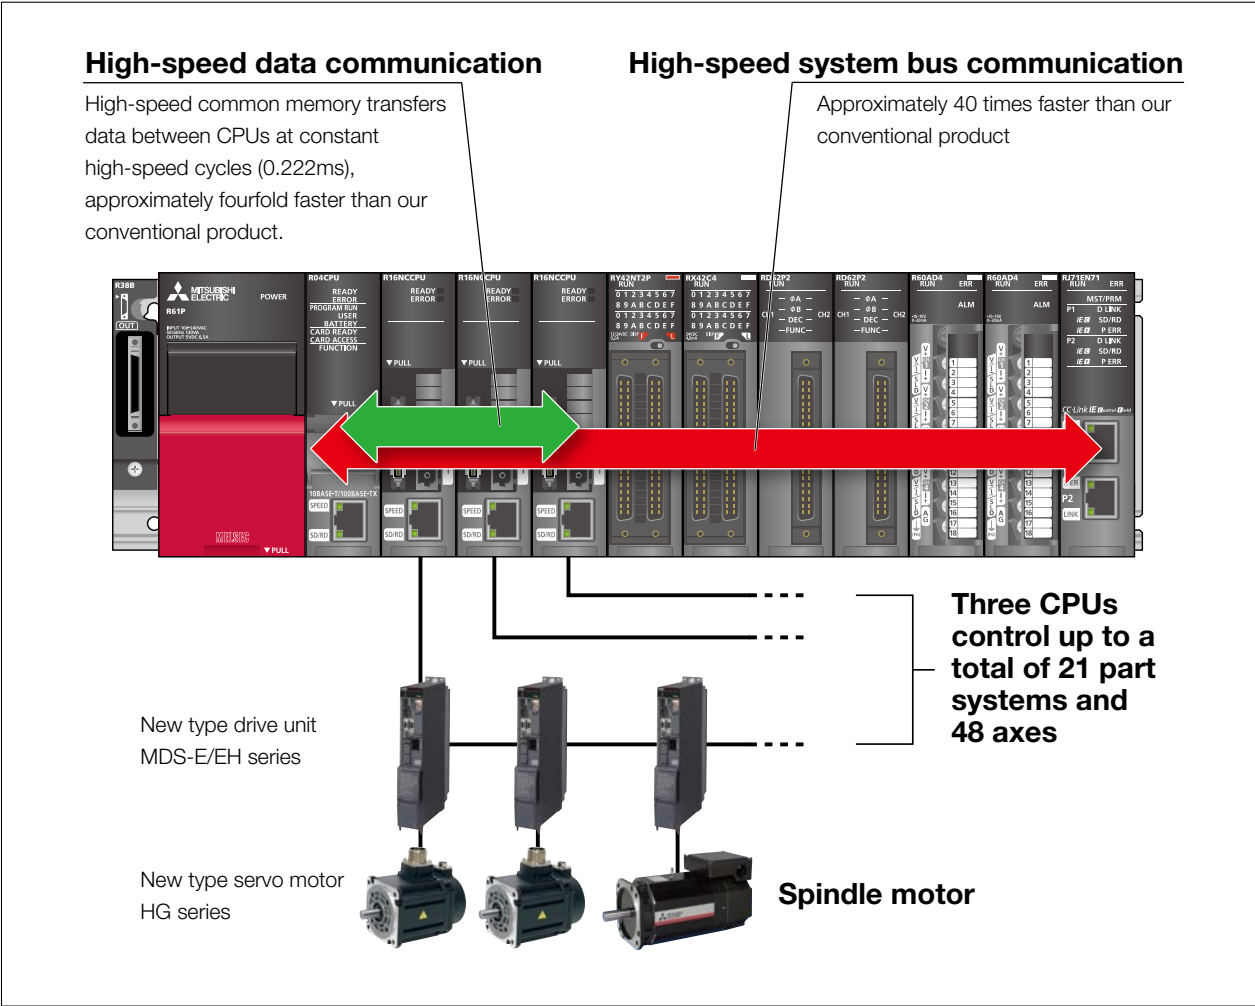

### PLC processing capability (PCMIX value)



High processing capability of the PLC enables large-scale ladder logic to be processed at high speed in response to the demands in the era of IoT.

### CNC-to-drive communication capability




Optical communication speed between CNC and drive has been increased. This improves system responsiveness, leading to more accurate machining.

### MSTB processing capability




Miscellaneous command processing between CNC and PLC became 1.5 times faster than our conventional product. Shorter processing time leads to reduction in cycle time.

### CNC functions ensure high speed and high accuracy

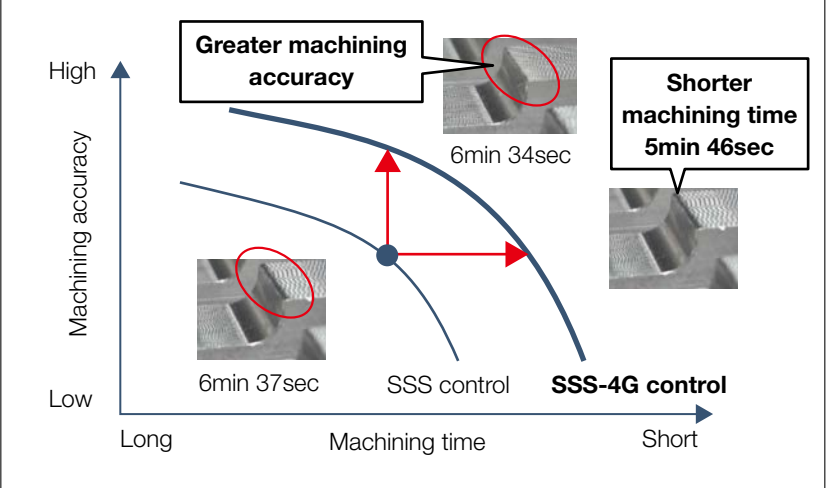


### SSS-4G Control

The M80 Series is equipped with Super Smooth Surface 4th-Generation (SSS-4G) control. This feature effectively reduces tact time, including acceleration and deceleration appropriate for the characteristics of each axis. SSS-4G control simultaneously enhances cutting accuracy, reducing cutting time while maintaining the same degree of accuracy compared to our previous models.

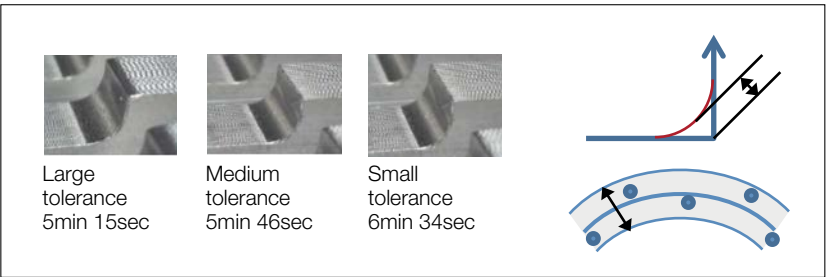

### Tolerance Control


This function enables operators to make high-quality surfaces simply by specifying the desired surface dimensional accuracy and providing a smooth cutting motion within specified error tolerances.

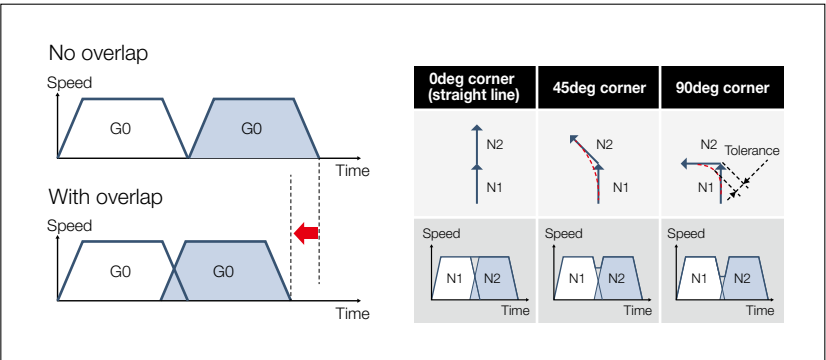

### Rapid Traverse Block Overlap

This function enables cutting of the next block to start before positioning deceleration (G00) or reference position return (G28/G30) has been completed, resulting in shorter intervals between cutting processes.

### Drive function increases speed

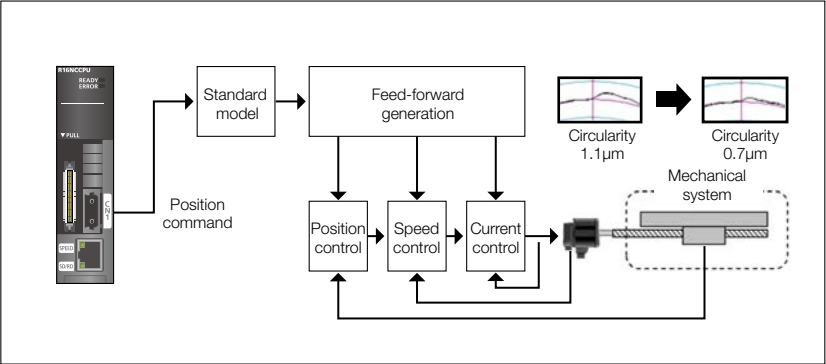

### OMR-FF Control

This function optimizes the position loop gain for each axis, leading to smoother and more accurate cutting, and drawing out the full potential of the machine tools.

# EXPANDABILITY *e-F@ctory*


The e-F@ctory integrated solution supports the future of machining in all areas, from development and manufacturing to maintenance, by utilizing advanced expertise and factory optimization to realize "total cost reduction."

## iQ Platform

The CNC C80 Series supports the iQ Platform, the integrated FA platform that forms the core of e-F@ctory.

## EDGE CROSS<sup>\*1</sup>


Utilization of open software platform "Edgecross" which realizes FA-IT coordination in the edge computing level enhances Edge computing and e-F@ctory.

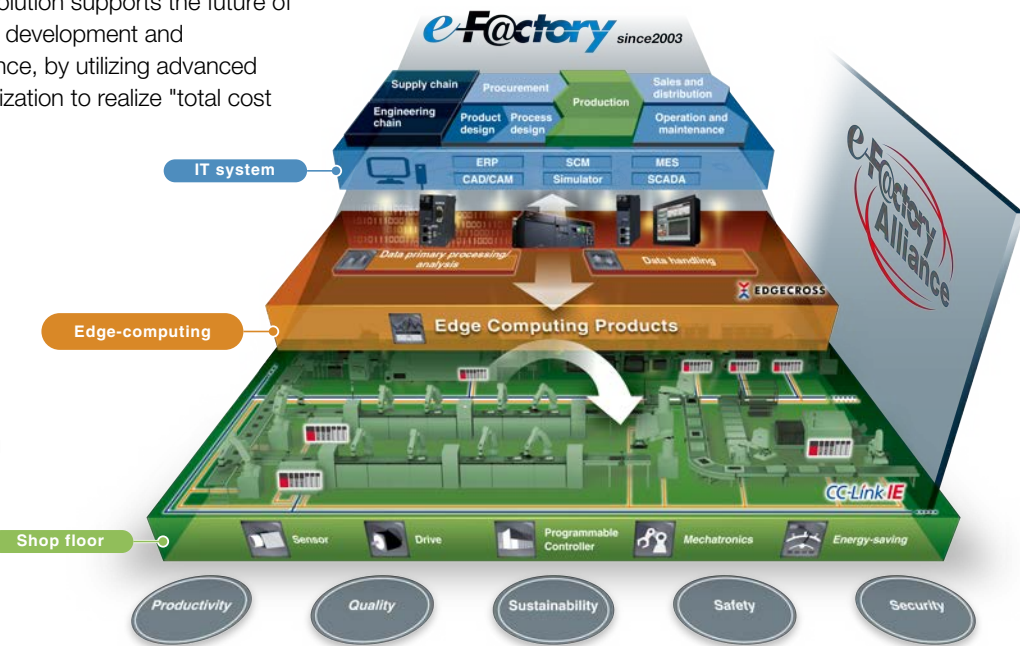

<sup>\*1</sup> Edgecross is a product of Edgecross Consortium

## This solution enables visualization and analysis that lead to improvements and increase availability at production sites.

The Manufacturing Execution System (MES) Interface is the link for data passing from production equipment to controlling devices. The High-speed Data Logger collects data from each measuring device directly without requiring dedicated logging equipment. The Box Data Logger can be connected to a network while existing equipment is running, and collect data thereafter. The C Language Controller provides control, information processing and higher-level communication using C/C++ programming. These products, which enable information sharing between FA and IT, implement factory-wide optimization, from higher-level information systems to facility management systems.

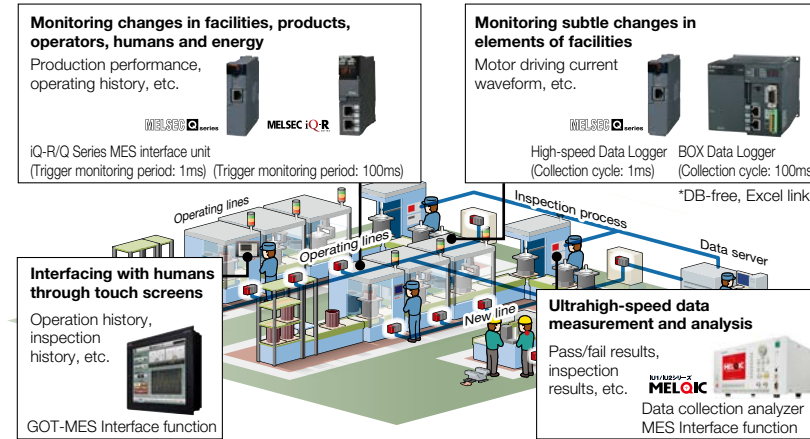

Data on shop floor have different characteristics according to their purposes

## e-F@ctory Alliance


e-Factory Alliance offers our customers the optimal solution across entire supply and engineering chains through strong alliances with partners who provide software and devices highly compatible with Mitsubishi FA products, and system integration partners who build systems using those products.

## Participating companies: 900 or more

(In total domestic and overseas, as of Sep. 2020)



## Flexible system configurations

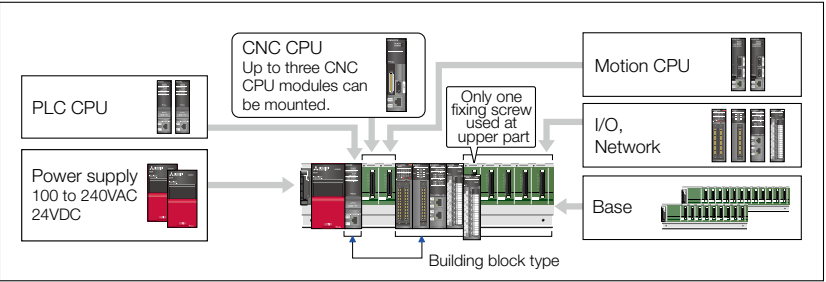

## Edge computing, the latest technology




The PLC CPU is independent in the C80 Series, enabling selection according to production scale and application, and best-fit configuration of hardware.

## MELIPC MI5000

One module realizes device control and information processing which were previously managed with a combination of computer and dedicated device for example. Equipped with real-time OS VxWorks®, the MELIPC realizes real-time control which cannot be achieved with general industrial computers, contributing to high-accuracy device control and information processing at high-speed.

## Support for "visualization" of shop floor

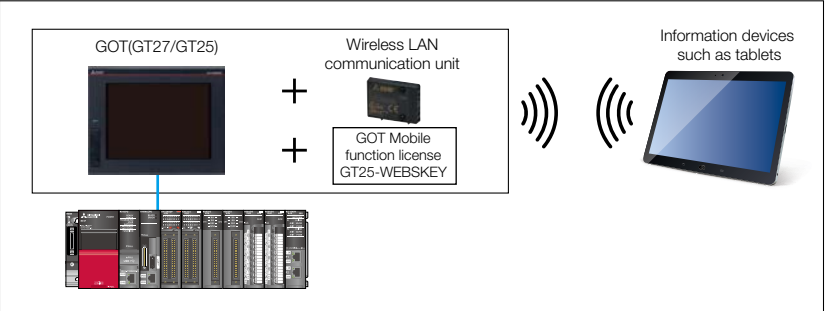


## GOT Mobile

Via GOT at the worksite, connected devices can be monitored from computers and tablets in a remote location.

<sup>\*A separate license (GT25-WEBSKEY) is required.</sup>

## Seamless connectivity between shop floor and host information system

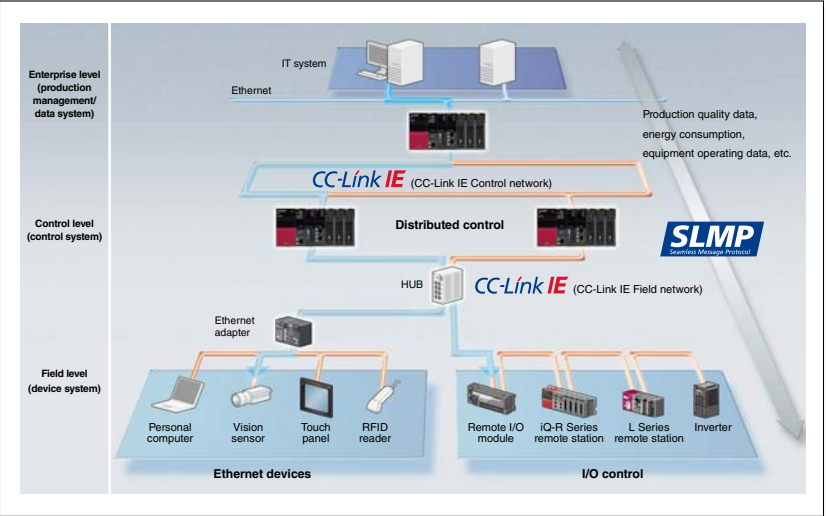

## Field network CC-Link IE Field

Single network covers high-speed controller distributed control, I/O control and safety control. The network allows a high degree of freedom in wiring for flexible equipment layouts.

## Controller network CC-Link IE Control

The controller network builds a highly reliable high-speed, large-capacity system and dual optical loop.




# USABILITY

CNC monitor2 newly developed to simplify use through the introduction of touch-screen operation displays the equivalent screen to the M800/M80 Series standard screens available in 8.4, 10.4 and 12.1-type models.



## More convenient guidance function

Pressing Help opens a guidance of the currently displayed screen (parameter, alarm or G-code format). This frees the operator from looking information up in a printed manual.

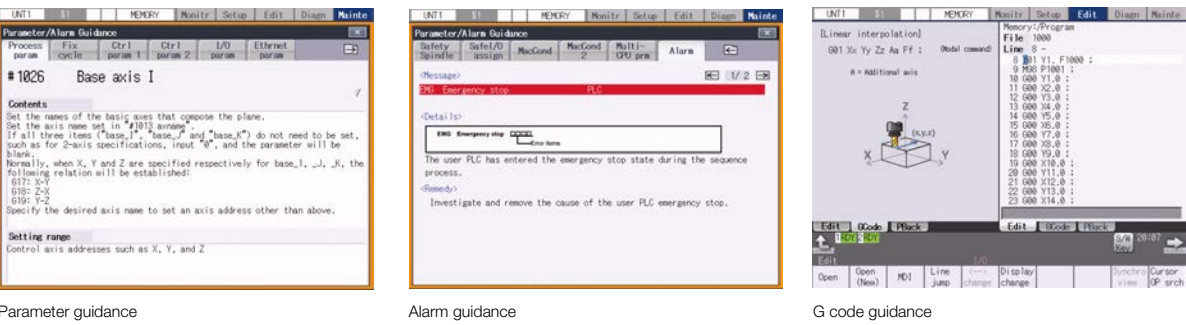

## Simple screen with enhanced visibility from a long distance



The simple monitor screen has been designed to make it easy to see and read only data required from a distance. Switching between Normal screen and Simple screen is done from the screen menu.

\*The simple display can be used only when the parameter #11019 (2-system display) is invalid.

## CNC monitor2 screen designed with pursuit of ease-of-use



Program edit screen enables direct-touch data entry, eliminating the use of cursor keys and realizing more intuitive operation.

## CNC monitor2 supports 17 languages



Display languages can be switched with a single parameter operation. This provides great ease of use for users worldwide.

Languages supported		
Japanese	Chinese (traditional)	Swedish
English	Chinese (simplified)	Turkish
German	Korean	Polish
Italian	Portuguese	Russian
French	Hungarian	Czech
Spanish	Dutch	

## Direct transition to CNC monitor2 screen



NC monitor2 allows a short-cut key to be designated for taking the operator directly to a specific CNC monitor2 screen from a machine builder-prepared screen. The key enables the operator to, for example, call up a parameter screen with a single touch instead of the conventional three-step operation. Additionally, machine builders can use CNC monitor2 screens as is, reducing the workload related to designing screens.

## VGA added to product line



CNC monitor2 supports VGA in addition to the conventional SVGA resolution, which expands the availability of GOT2000 Series.




# MAINTENANCE

The C80 Series has greatly improved maintenance features compared to our conventional product, including the ability to acquire three times the alarm and warning history data. The program number and PLC number of the machining program executed can also be acquired, leading to early problem solving and less downtime.


## CNC CPU requires no batteries

The CNC CPU backs up NC data (e.g., parameters, machining programs and alarm history) without the use of batteries. Trouble-some battery management and battery exchange are no longer required, leading to a reduction in maintenance costs.

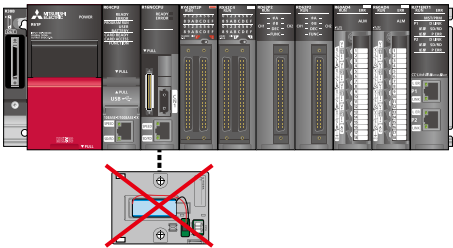


## Motor insulation degradation detection function

Insulation resistance value measured by a drive unit can be displayed. The trend graph displayed on GOT can be used for preventive maintenance.

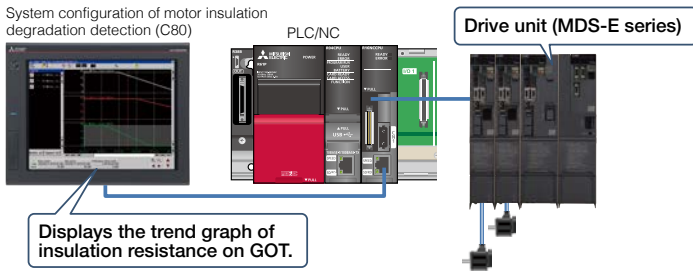


## Operation history

This function traces various histories and NC operating information to analyze and solve troubles etc. This information is recorded in the history data file, it can be displayed on the screen and can also be output to a file.

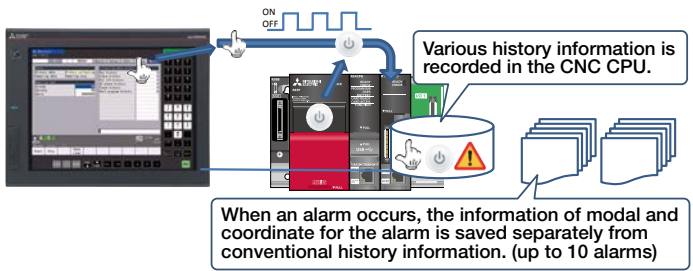

## Log viewer function

GOT log viewer function displays the NC sampling data. This enables waveforms to be diagnosed on the spot for early trouble-shooting. In addition, the trends of insulation resistance value can be checked on the viewer. (Displays last 13 months data on a monthly basis)

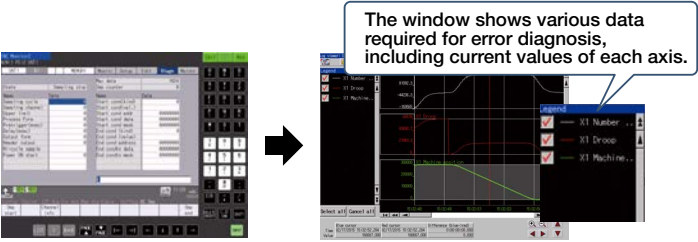

## GOT backup/restoration

The C80 Series supports data storage (backup) and writing (restore) of not only C80 parameters and programs, but also PLC CPU data into SD memory card or the USB memory of the GOT. The system can be restored using GOT only, enabling parts to be exchanged for quick system restoration.



## On-board ladder edit of GOT

Use the GOT "Sequence program monitor (R Ladder) function" to edit sequence ladder programs without requiring GX Works on a computer. Ladder program operation status can be confirmed as well.




# SAFETY

The C80 Series provides a range of safety features collectively called the "Smart Safety Observation Function". This function has achieved full conformity with the safety standards that cover the entire system including CNC, drive, I/O, sensors and communication.

## Smart Safety Observation Function


- |  |                               |                                    |
|--|-------------------------------|------------------------------------|
| Safety-related I/O observation               | Emergency stop observation    | Safety Communication Network (SCN) |
| Safely-Limited Speed (SLS)                   | Safely-Limited Position (SLP) |                                    |
| Safe Operating Stop (SOS)                    | Safe Speed Monitor (SSM)      |                                    |
| Safe Brake Control/Safe Brake Test (SBC/SBT) | Safe Cam (SCA)                |                                    |
| Safe Stop (SS1/SS2)                          | Safe Torque Off (STO)         |                                    |

## Easy functional safety system configuration

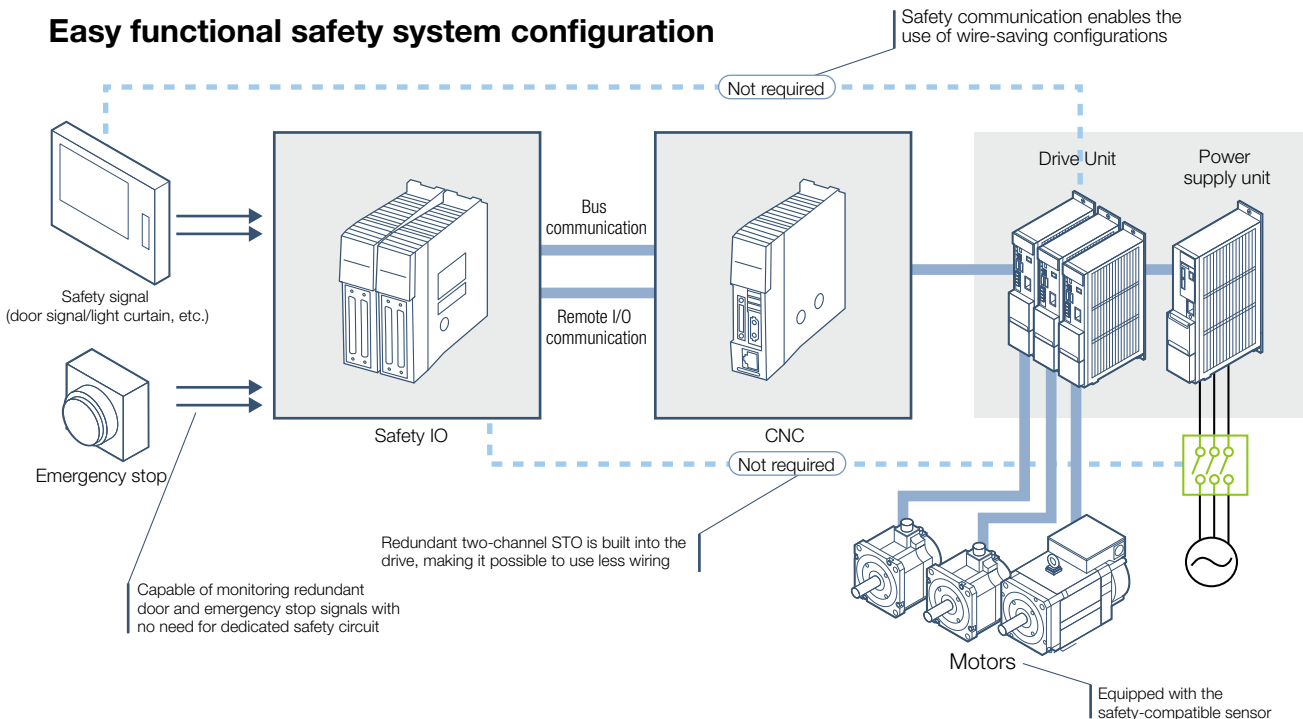


# SOFTWARE TOOLS

Flow from machine design and development to operation and maintenance

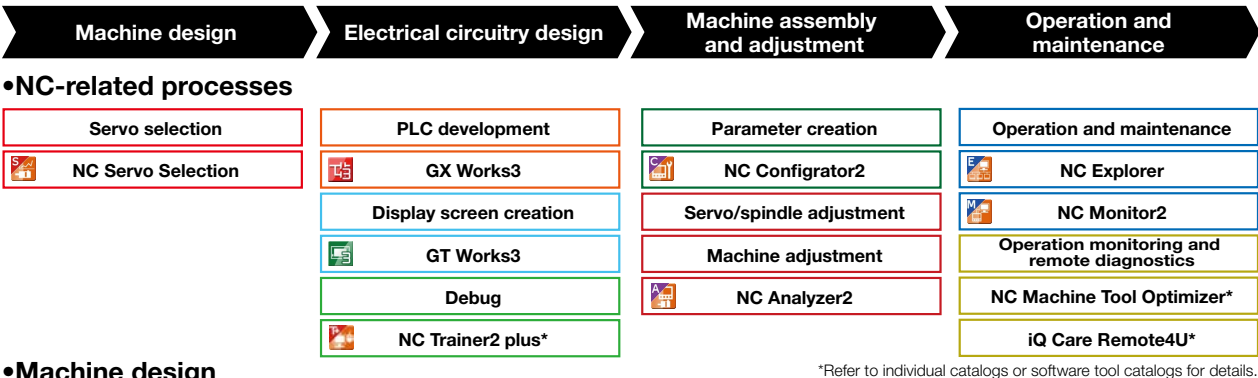


•Machine design

Use the following instructions to set machining parameters



Servo motor selection

Calculation results of the spindle acceleration/deceleration times



The spindle acceleration/deceleration times are shown in a graph.


[NC Servo Selection]

Input machining parameters to determine the optimum servo motor. This function automatically calculates spindle acceleration/deceleration time and selects the optimum power supply module.

•Electrical circuitry design

[GX Works3]

GX Works3 is the programming and maintenance software designed for the MELSEC iQ-R Series control system. Graphic-based system configuration helps to reduce engineering time to 60% over our conventional product\*1

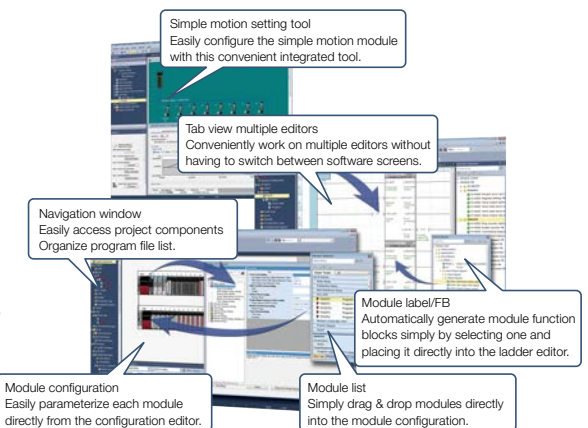

Simple motion setting tool  
Easily configure the simple motion module with this convenient integrated tool.

Tab view multiple editors  
Conveniently work on multiple editors without having to switch between software screens.

Navigation window  
Easily access project components  
Organize program file list.

Module label/FB  
Automatically generate module function blocks simply by selecting one and placing it directly into the ladder editor.

Module configuration  
Easily parameterize each module directly from the configuration editor.

Module list  
Simply drag & drop modules directly into the module configuration.


[Global operation realized with multi-language support]

To meet today's global production needs, the GX Works3 supports multi-language features at various levels, such as a multi-language software menu system and language-switching for device comment functions.

\*1: Based on new project test benchmarks between GX Works2 and GX Works3.

[GT Works3]

This integrated software is used to create professional screen designs for GOTs. Developed based on the concepts of simplicity, streamline and user-friendly, this powerful tool pushes operational boundaries to deliver infinite design possibilities.

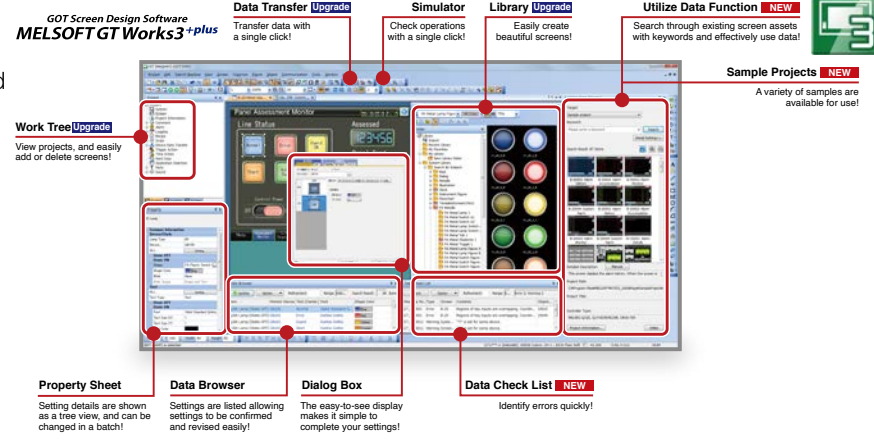

GOT Screen Design Software  
MELSOFT GT Works3\*plus

Work Tree Upgrade  
View projects, and easily add or delete screens!

Data Transfer Upgrade  
Transfer data with a single click!

Simulator  
Check operations with a single click!

Library Upgrade  
Easily create beautiful screens!

Utilize Data Function NEW  
Search through existing screen assets with keywords and effectively use data!

Sample Projects NEW  
A variety of samples are available for use!

Property Sheet  
Setting details are shown as a tree view, and can be changed in a batch!

Data Browser  
Settings are listed allowing settings to be confirmed and revised easily!


Dialog Box  
The easy-to-see display makes it simple to complete your settings!

Data Check List NEW  
Identify errors quickly!

For compatible versions, please contact us.  
\*GT Designer3 screen image

For details on GX Works3, please refer to the GX Works3 catalog (L(NA)08334).  
For details on GT Works3, please refer to the GT Works3 catalog (L(NA)08170).  
For details on each software tool, refer to the software tools catalog (BNP-A1246).

•Machine assembly and adjustment

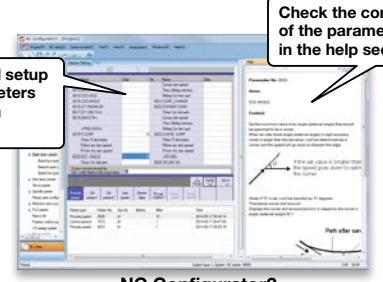


Check and setup the parameters list using a computer.

Check the contents of the parameters in the help section.

NC Configurator2

[NC Configurator2]

NC parameters required for NC control or machine operation can be edited on a computer. It is also possible to create initial parameters simply by inputting the machine configuration.



Adjusting with simple parameter settings

Servo parameters are adjusted automatically


Results displayed in bode diagram

NC Analyzer2

[NC Analyzer2]

Servo parameters can be adjusted automatically by measuring and analyzing machine characteristics. Measurement and analysis can be done by running a servo motor using the machining program for adjustment, or using the vibration signal. This function can sample various types of data.

•Operation and maintenance

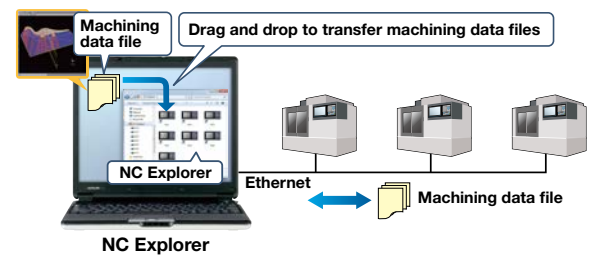

Machining data file

Drag and drop to transfer machining data files


NC Explorer

Ethernet

Machining data file

[NC Explorer]

CNC machining data can be managed using Windows® Explorer on a computer when the computer is connected to multiple CNCs via Ethernet.

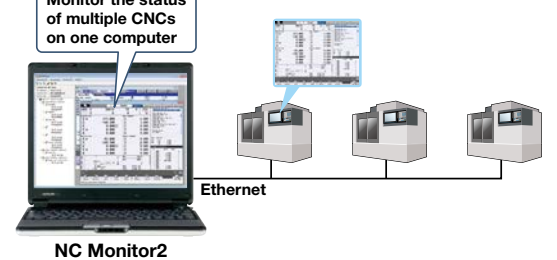

Monitor the status of multiple CNCs on one computer

NC Monitor2

Ethernet

[NC Monitor2]

Taking advantage of connection with a factory network, CNC operation status can be monitored from remote locations. Several CNCs can be connected and monitored simultaneously.



# DRIVE SYSTEM

•Drive units



**High-performance Servo/Spindle Drive Units MDS-E/EH Series**

- The servo control-dedicated core processor realizes improved control speed, leading to enhanced basic performance. When combined with a higher resolution motor sensor and enhanced high-speed optical communication, this drive contributes to high-speed, high-accuracy control.
- The motor power connector is equipped with an anti-misinsertion mechanism. This helps to eliminate connection errors.
- Improved diagnostic and preventive maintenance features
- Safe Torque Off (STO) and Safe Brake Control (SBC) are also incorporated as additional safety features.



**Multi-hybrid Drive Units MDS-EM/EMH Series**

- Multi-hybrid drive units are capable of driving a maximum of three servo axes and one spindle. This contributes to downsizing machines and offers technical advantages.
- The motor power connector is equipped with an anti-misinsertion mechanism. This helps to eliminate connection errors.
- Safe Torque Off (STO) and Safe Brake Control (SBC) are also incorporated as additional safety features.
- The fan unit facilitates fan exchange.
- An MDS-EMH drive unit is available for 400V systems.



**All-in-one Compact Drive Units MDS-EJ/EJH Series**

- Ultra-compact drive units with built-in power supply contribute to smaller control panel size.
- A 2-axis type has been added for further downsizing.
- The servo control-dedicated core processor realizes improved control speed, leading to improved basic performance. When combined with a higher resolution motor sensor and enhanced high-speed optical communication, this drive contributes to high-speed, high-accuracy control.
- Safe Torque Off (STO) and Safe Brake Control (SBC) are also incorporated as additional safety features.
- An MDS-EJH drive unit is available for 400V systems. (Note 1)



**PWM Converter MDS-EX-CVP Series**

- Products of the PWM converter series which provides a stabilizing DC voltage function and boost function. The MDS-EX-CVP Series reduces the output deceleration of the spindle motor and improves output in the high-speed range.
- Available for 400V system power supply units only.

•Servo motors



**Medium-inertia, High-accuracy, High-speed Motors HG Series**

- Sensor resolution has been significantly improved. These servo motors, which boast smooth rotation and outstanding acceleration capabilities, are well-suited as feed axes of machine tools.
- Range: 0.2 to 11 [kW]
- Maximum rotation speed: 2,000 to 6,000 [r/min]
- Safety support sensors are included as standard specification. Three sensor resolutions (i.e., 1, 4 or 67 million pulses/rev) are available.
- These motors can also be used as a tool spindle motor.
- The small-sized connector allows horizontal cable connection to save space in machines. (Note 2)



**Linear Servo Motors LM-F Series**

- These motors can be used in clean environments, since no ball screws are used, eliminating possible grease contamination.
- Elimination of transmission mechanisms, including backlash, enables smooth, quiet operation even at high speeds.
- Range: Maximum thrust: 900 to 18,000 [N·m]



**Direct-drive Servo Motors TM-RB Series**

- High-torque, direct-drive motors combined with high-gain control provide quick acceleration and positioning, making rotation smoother.
- Suitable for rotary axes that drive tables or spindle heads
- Range: Maximum torque: 36 to 1,280 [N·m]

•Spindle motors



**High-output, High-speed Spindle Motors SJ-DG Series**

- The addition of S3 rating (%ED rating) has improved output and torque acceleration/deceleration characteristics.
- A balance adjustment ring added to the counter-load side allows for fine tuning.
- Range: S3 rating: 5.5 to 15 [kW]
- Maximum rotation speed: 10,000 to 12,000 [r/min]

**High-performance Spindle Motors SJ-D Series**

- Motor energy loss has been significantly reduced by optimizing the magnetic circuit.
- High-speed bearings are incorporated as a standard feature, helping to achieve higher speed, lower vibration and improved durability.
- Range: 3.7 to 26 [kW]
- Maximum rotation speed: 8,000 to 12,000 [r/min]

**High-torque Spindle Motors SJ-DN Series**

- Higher torque characteristics than those of the SJ-D Series with the same output. This series can be driven with a small-capacity multi-hybrid drive unit.
- Suitable for heavy cutting. Helps to improve productivity.
- Range: 7.5 to 18.5 [kW]
- Maximum rotation speed: 8,000 [r/min]

**Low-inertia, High-speed Spindle Motors SJ-DL Series**

- This series of spindle motors is dedicated for use in tapping machines that require faster drilling and tapping.
- The latest design technologies make it possible to attain lower vibration and greater rigidity even with lighter weight.
- Range: 0.75 to 7.5 [kW]
- Maximum rotation speed: 10,000 to 24,000 [r/min]

**Compact, Lightweight Spindle Motors SJ-DJ Series**

- Spindle motors that are smaller and lighter than the SJ-D Series with the same output. This helps to further downsize machines.
- Range: 5.5 to 15 [kW]
- Maximum rotation speed: 8,000 to 12,000 [r/min]

**High-output High-torque IPM Spindle Motors SJ-DM Series**

- The use of magnets allows for higher output and torque, leading to reduced cycle time.
- The SJ-DM Series can provide torque characteristics comparable to the former SJ-D Series of the next frame number.
- Maximum rotation speed: 12,000 [r/min]



**Built-in Spindle Motors SJ-BG Series**

- The electrical design has been optimized to increase the continuous rated torque per unit volume, contributing to downsizing spindle units.
- Options for mold and cooling jacket specifications are available.



**Tool Spindle Motors HG-JR Series**

- Compact tool spindle motors are designed to have the small, high-output characteristics of servo motors yet offer high-speed rotation (8,000r/min). These motors contribute to downsizing spindle size, like rotary tool spindles.
- Range: 0.75 to 1.5 [kW]
- Maximum rotation speed: 8,000 [r/min]
- Small-sized connector allows horizontal cable connection to save space in machines. (Note 2)

(Note 1) For servo motors only  
(Note 2) Options supported (Flange size 90SQ only)  
\* Use Mitsubishi Electric CNC's dedicated drive unit and motor.

LIST OF COMPONENTS

CNC-CPU unit

Product	Model	Remarks
CNC control module	R16NCCPU-S1	

GOT2000 related unit  
SD card

Product	Model	Model code	Remarks
SD card	NZ1MEM-2GBSD	1WC535	2GB SD memory card for GOT

GT27 Model

Product		Model	Model code	Remarks	
GT27 Model	GT2715	GT2715-XTBA	1EA790	15" XGA[1024×768 dots]TFT color LCD 65536 colors (Multimedia & Video/RGB compliant Multi-touch compliant) 100 to 240VAC, User memory Memory for storage (ROM): 57MB, Memory for operation (RAM): 128MB GT Designer3 Version (GOT2000) 1.117X or later is required.	
		GT2712	GT2712-STBA	1EA780	12.1" SVGA [800×600 dots] TFT color LCD 65536 colors (Multimedia & Video / RGB compliant Multi-touch compliant) 100 to 240VAC, User memory Memory for storage (ROM): 57MB, Memory for operation (RAM): 128MB GT Designer3 Version1 (GOT2000) 1.155M or later is required.
	GT2712-STBD		1EA781	12.1" SVGA [800×600 dots] TFT color LCD 65536 colors (Multimedia & Video / RGB compliant Multi-touch compliant) 24VDC, User memory Memory for storage (ROM): 57MB, Memory for operation (RAM): 128MB GT Designer3 Version1 (GOT2000) 1.155M or later is required.	
	GT2710	GT2710-STBA	1EA770	10.4" SVGA [800×600 dots] TFT color LCD 65536 colors (Multimedia & Video / RGB compliant Multi-touch compliant) 100 to 240VAC, User memory Memory for storage (ROM): 57MB, Memory for operation (RAM): 128MB GT Designer3 Version1 (GOT2000) 1.155M or later is required.	
		GT2710-STBD	1EA771	10.4" SVGA [800×600 dots] TFT color LCD 65536 colors (Multimedia & Video / RGB compliant Multi-touch compliant) 24VDC, User memory Memory for storage (ROM): 57MB, Memory for operation (RAM): 128MB GT Designer3 Version1 (GOT2000) 1.155M or later is required.	
	GT2708	GT2708-STBA	1EA740	8.4" SVGA [800×600 dots] TFT color LCD 65536 colors (Multimedia & Video / RGB compliant Multi-touch compliant) 100 to 240VAC, User memory Memory for storage (ROM): 57MB, Memory for operation (RAM): 128MB GT Designer3 Version1 (GOT2000) 1.155M or later is required.	
		GT2708-STBD	1EA741	8.4" SVGA [800×600 dots] TFT color LCD 65536 colors (Multimedia & Video / RGB compliant Multi-touch compliant) 24VDC, User memory Memory for storage (ROM): 57MB, Memory for operation (RAM): 128MB GT Designer3 Version1 (GOT2000) 1.155M or later is required.	
	GT2710	GT2710-VTBA	1EA760	10.4" VGA [640×480 dots] TFT color LCD 65536 colors (Multimedia & Video / RGB compliant Multi-touch compliant) 100 to 240VAC, User memory Memory for storage (ROM): 57MB, Memory for operation (RAM): 128MB GT Designer3 Version1 (GOT2000) 1.165X or later is required.	
		GT2710-VTBD	1EA761	10.4" VGA [640×480 dots] TFT color LCD 65536 colors (Multimedia & Video / RGB compliant Multi-touch compliant) 24VDC, User memory Memory for storage (ROM): 57MB, Memory for operation (RAM): 128MB GT Designer3 Version1 (GOT2000) 1.165X or later is required.	
	GT2708	GT2708-VTBA	1EA730	8.4" VGA [640×480 dots] TFT color LCD 65536 colors (Multimedia & Video / RGB compliant Multi-touch compliant) 100 to 240VAC, User memory Memory for storage (ROM): 57MB, Memory for operation (RAM): 128MB GT Designer3 Version1 (GOT2000) 1.165X or later is required.	
		GT2708-VTBD	1EA731	8.4" VGA [640×480 dots] TFT color LCD 65536 colors (Multimedia & Video / RGB compliant Multi-touch compliant) 24VDC, User memory Memory for storage (ROM): 57MB, Memory for operation (RAM): 128MB GT Designer3 Version1 (GOT2000) 1.165X or later is required.	
	GT2705	GT2705-VTBD	1EA721	5.7" VGA [640×480 dots] TFT color LCD 65536 colors (Multi-touch compliant) 24VDC, User memory Memory for storage (ROM): 32MB, Memory for operation (RAM): 80MB GT Designer3 Version1 (GOT2000) 1.165X or later is required.	
	Protective sheet		GT27-15PSCC	1EK313	Surface treatment: anti-glare, Sheet color: transparent, USB environmental protection cover area: open, Number of sheets included in a set: 5
			GT25-12PSCC	1EK307	For 12.1" Clear type, Transparent, With a hole for the USB environmental protection cover, A set of 5 sheets.
			GT25-10PSCC	1EK304	For 10.4" Clear type, Transparent, With a hole for the USB environmental protection cover, A set of 5 sheets.
			GT25-08PSCC	1EK301	For 8.4" Clear type, Transparent, With a hole for the USB environmental protection cover, A set of 5 sheets.
			GT25-05PSCC	1EK316	For 5.7" Clear type, Transparent, With a hole for the USB environmental protection cover, A set of 5 sheets.

GT25 Model

Product		Model	Model code	Remarks
GT25 Model	GT2512	GT2512-STBA	1EA580	12.1"" SVGA [800×600 dots] TFT color LCD 65536 colors 100 to 240VAC, User memory Memory for storage (ROM): 32MB, Memory for operation (RAM): 80MB GT Designer3 Version1 (GOT2000) 1.155M or later is required.
		GT2512-STBD	1EA581	12.1"" SVGA [800×600 dots] TFT color LCD 65536 colors 24VDC, User memory Memory for storage (ROM): 32MB, Memory for operation (RAM): 80MB GT Designer3 Version1 (GOT2000) 1.155M or later is required.
	GT2510	GT2510-VTBA	1EA560	10.4"" VGA [640×480 dots] TFT color LCD 65536 colors 100 to 240VAC, User memory Memory for storage (ROM): 32MB, Memory for operation (RAM): 80MB GT Designer3 Version1 (GOT2000) 1.165X or later is required.
		GT2510-VTBD	1EA561	10.4"" VGA [640×480 dots] TFT color LCD 65536 colors 24VDC, User memory Memory for storage (ROM): 32MB, Memory for operation (RAM): 80MB GT Designer3 Version1 (GOT2000) 1.165X or later is required.
	GT2508	GT2508-VTBA	1EA530	8.4"" VGA [640×480 dots] TFT color LCD 65536 colors 100 to 240VAC, User memory Memory for storage (ROM): 32MB, Memory for operation (RAM): 80MB GT Designer3 Version1 (GOT2000) 1.165X or later is required.
		GT2508-VTBD	1EA531	8.4"" VGA [640×480 dots] TFT color LCD 65536 colors 24VDC, User memory Memory for storage (ROM): 32MB, Memory for operation (RAM): 80MB GT Designer3 Version1 (GOT2000) 1.165X or later is required.
	GT25 Handy GOT	GT2506HS-VTBD	09J922	Display section: 6.5" VGA, TFT color LCD, 65536 colors, panel color: black, power supply: 24VDC GT Works3 Version1.195D or later.
	GT25 Handy Connector conversion box	GT16H-CNB-42S	09V701	For converting the Handy GOT signals into individual signals for the terminal block, D-sub connector, and Ethernet RJ-45.
	GT25 Handy External connection cable (to connect the connector conversion box)	GT16H-C30-42P	09V702	For connection between the Handy GOT and the connector conversion box (GT16H-CNB-42S) 3m
		GT16H-C60-42P	09V703	For connection between the Handy GOT and the connector conversion box (GT16H-CNB-42S) 6m
	GT16H-C100-42P	09V704	For connection between the Handy GOT and the connector conversion box (GT16H-CNB-42S) 10m	

MELSEC iQ-R Series modules

Product		Model	Model code	Remarks
PLC CPU		R04CPU	1FMA00	Program capacity, 40K steps; basic operation processing speed (LD instruction), 0.98ns
		R08CPU	1FMA01	Program capacity, 80K steps; basic operation processing speed (LD instruction), 0.98ns
		R16CPU	1FMA02	Program capacity, 160K steps; basic operation processing speed (LD instruction), 0.98ns
		R32CPU	1FMA03	Program capacity, 320K steps; basic operation processing speed (LD instruction), 0.98ns
		R120CPU	1FMA04	Program capacity, 1200K steps; basic operation processing speed (LD instruction), 0.98ns
SD memory card		NZ1MEM-2GBSD	1WC535	SD memory card, 2Gbytes
Extended SRAM cassette		NZ2MC-1MBS	1FMB00	1Mbytes
Main base		R35B	1FME00	5 slots, for MELSEC iQ-R Series modules
		R38B	1FME01	8 slots, for MELSEC iQ-R Series modules
		R312B	1FME02	12 slots, for MELSEC iQ-R Series modules
Extension base		R65B	1FME07	5 slots, for MELSEC iQ-R Series modules
		R68B	1FME06	8 slots, for MELSEC iQ-R Series modules
		R612B	1FME05	12 slots, for MELSEC iQ-R Series modules
RQ extension base		RQ65B	1FME08	5 slots, for MELSEC-Q Series modules
		RQ68B	1FME03	8 slots, for MELSEC-Q Series modules
		RQ612B	1FME04	12 slots, for MELSEC-Q Series modules
Extension cable		RC06B	1FM001	0.6m cable for extension and RQ extension base units
		RC12B	1FM002	1.2m cable for extension and RQ extension base units
		RC30B	1FM003	3m cable for extension and RQ extension base units
		RC50B	1FM004	5m cable for extension and RQ extension base units
Power supply		R61P	1FMC00	AC power supply; input, 100 to 240VAC; output, 5VDC/6.5A
		R62P	1FMC02	AC power supply; input, 100 to 240VAC; output, 5VDC/3.5A, 24VDC/0.6A
		R63P	1FMC01	DC power supply; input, 24VDC; output, 5VDC/6.5A
Input	AC	R64P	1FMC03	AC power supply; input, 100 to 240VAC; output, 5VDC/9A
		RX10	1FM103	AC input, 16 points; 100 to 120VAC (50/60 Hz)
		RX40C7	1FM100	DC input, 16 points; 24VDC, 7.0mA
	DC (Positive/Common/ Negative Common Shared Type)	RX41C4	1FM101	DC input, 32 points; 24VDC, 4.0mA
		RX42C4	1FM102	DC input, 64 points; 24VDC, 4.0mA
		RX41C4-TS	1FM113	DC input, 32 points; 24VDC, 4.0mA, Spring clamp terminal block
		Relay	RY10R2	1FM153
RY18R2A	1FM15A		Relay output, 8 points; 24VDC/2A, 240VAC/2A	
RY20S6	1FM157		Triac output, 16 points; 100 to 240VAC/0.6A	
Output	Transistor (Sink)	RY40NT5P	1FM150	Transistor (sink) output, 16 points; 12 to 24VDC, 0.5A
		RY41NT2P	1FM151	Transistor (sink) output, 32 points; 12 to 24VDC, 0.2A
		RY42NT2P	1FM152	Transistor (sink) output, 64 points; 12 to 24VDC, 0.2A
		RY40PT5P	1FM154	Transistor (source) output, 16 points; 12 to 24VDC, 0.5A
	Transistor (Source)	RY41PT1P	1FM155	Transistor (source) output, 32 points; 12 to 24VDC, 0.1A
		RY42PT1P	1FM156	Transistor (source) output, 64 points; 12 to 24VDC, 0.1A
	RY41PT1P-TS	1FM15E	Transistor (source) output, 32 points; 12 to 24VDC, 0.1A, Spring clamp terminal block	
I/O combined	DC input/ transistor output	RH42C4NT2P	1FM200	DC input, 32 points; 24VDC, 4.0mA Transistor (sink) output, 32 points; 12 to 24VDC, 0.2A
Connector		A6CON1	13L101	Soldering 32 point-connector (40-pin connector)
		A6CON2	13L102	Solderless terminal connection 32 point-connector (40-pin connector)
		A6CON3	13L103	Flat-cable pressure displacement 32 point-connector (40-pin connector)
		A6CON4	13L124	Soldering 32 point-connector (40-pin connector, bidirectional cable mountable)
Spring clamp terminal block		Q6TE-18SN	1W4299	For 16-point I/O modules, 0.3 to 1.5mm <sup>2</sup> (22...16AWG)
Connector/terminal block conversion module		A6TBX70	13L112	For positive common input modules (3-wire type)
		A6TBXY36	13L106	For positive common input modules and sink output modules (standard type)
		A6TBXY54	13L109	For positive common input modules and sink output modules (2-wire type)
Connector/ terminal block conversion module	cable	AC05TB	13L006	For A6TBXY36, A6TBXY54, and A6TBX70 (positive common/sink type), 0.5m
		AC10TB	13L007	For A6TBXY36, A6TBXY54, and A6TBX70 (positive common/sink type), 1m
		AC20TB	13L008	For A6TBXY36, A6TBXY54, and A6TBX70 (positive common/sink type), 2m
		AC30TB	13L009	For A6TBXY36, A6TBXY54, and A6TBX70 (positive common/sink type), 3m
		AC50TB	13L010	For A6TBXY36, A6TBXY54, and A6TBX70 (positive common/sink type), 5m
		AC80TB	13L026	For A6TBXY36, A6TBXY54, and A6TBX70 (positive common/sink type), 8m" *Common current 0.5A or lower
		AC100TB	13L027	For A6TBXY36, A6TBXY54, and A6TBX70 (positive common/sink type), 10m" *Common current 0.5A or lower
Relay terminal module		A6TE2-16SRN	13L131	For 40-pin connector 24VDC transistor output modules (sink type)
	cable	AC06TE	13L021	For A6TE2-16SRN, 0.6m
		AC10TE	13L022	For A6TE2-16SRN, 1m
		AC30TE	13L023	For A6TE2-16SRN, 3m
		AC50TE	13L024	For A6TE2-16SRN, 5m
		AC100TE	13L025	For A6TE2-16SRN, 10m
Analog input		Voltage input	R60ADV8	1FM503
	Current input	R60ADI8	1FM504	8 channels for current inputs 0 to 20mADC/0 to 32000; 80μs/CH
	Voltage/ current input	R60AD4	1FM501	4 channels for voltage/current inputs -10 to 10VDC, -32000 to 32000; 0 to 20mADC, 0 to 32000; 80μs/CH
Analog output	Voltage output	R60DAV8	1FM505	8 channels for voltage outputs -32000 to 32000, -10 to 10VDC; 80μs/CH
	Current output	R60DAI8	1FM506	8 channels for current outputs 0 to 32000, 0 to 20mADC; 80μs/CH
	Voltage/ current output	R60DA4	1FM502	4 channels for voltage/current outputs -32000 to 32000, -10 to 10VDC; 0 to 32000, 0 to 20mADC; 80μs/CH
Temperature control	Platinum temperature-measuring resistor	R60TCRT4	1FY40E	RTD (Pt100, JPt100), 4 channels for input
		R60TCRT4BW	1FY40F	RTD (Pt100, JPt100), 4 channels for input, heater disconnection detection
	Thermocouple	R60TCRT2TT2	1FY40C	Thermocouple (B, R, S, K, E, J, T, N, U, L, PL@, W5Re/W26Re), 4 channels for input (2 channels can also be used for RTD input)
		R60TCRT2TT2BW	1FY40D	Thermocouple (B, R, S, K, E, J, T, N, U, L, PL@, W5Re/W26Re), 4 channels for input (2 channels can also be used for RTD input), heater disconnection detection



INSTALLATION ENVIRONMENT CONDITIONS

CNC CPU module

Item	Specification				
Ambient operating temperature	0 to 55°C				
Ambient storage temperature	-25 to 75°C				
Ambient operating humidity	5 to 95%RH, non-condensing				
Ambient storage humidity	5 to 95%RH, non-condensing				
Vibration resistance		Frequency	Constant acceleration	Half amplitude	Sweep count
	Under intermittent vibration	5 to 8.4Hz	-	3.5mm	10 times each in X, Y and Z directions (80 min.)
		8.4 to 150Hz	9.8m/s²	-	
	Under continuous vibration	5 to 8.4Hz	-	1.75mm	-
		8.4 to 150Hz	4.9m/s²	-	
Shock resistance	147m/s², 3 times in each of 3 directions X, Y and Z				
Operating ambience	No corrosive gases or inflammable gases				
Operating altitude	2000m (6561.68ft.) or lower (Note 3)				
Installation location	Inside control panel				
Overvoltage category (Note 1)	II or less				
Pollution level (Note 2)	2 or less				

C80, which is open equipment, must be installed within a sealed metal control panel (IP54 or higher). C80 must also be used and stored under the conditions listed in the specifications table above. The following environmental conditions are also required for the layout design.

- No large amount of accumulated dust, iron filings, oil mist, salt, or organic solvents
- No direct sunlight
- No strong electrical or magnetic fields
- No direct vibrations or shocks

(Note 1) Assumes that module is connected between a public power distribution network and local machinery.  
Category II applies to equipment for which electrical power is supplied from fixed facilities. The surge voltage withstand level for the rated voltage of up to 300V is 2,500V.  
(Note 2) Indicates the degree to which material accumulates in terms of the environment where the equipment is used.  
Pollution level 2 means that only non-conductive pollution can occur. However, temporary conductivity may be caused by accidental condensation.  
(Note 3) Do not use or store C80 Series modules under pressure higher than the atmospheric pressure of altitude 0m. Doing so may cause operation failure.

LIST OF MANUALS

Manuals relating to the C80 are listed below. For the latest versions, please contact us.

Classification	Manual title	Manual No.	Intended purpose/contents
C80	M800/M80/E80/C80 Series Specifications Manual (Function)	IB-1501505	・Model selection   ・Outline of various functions
	M800/M80/E80/C80 Series Specifications Manual (Hardware)	IB-1501506	・Model selection   ・Specifications of hardware
	M800/M80/E80/C80 Series PLC Interface Manual	IB-1501272	・Electrical circuitry design   ・Interface signals between NC and PLC
	M800/M80/E80/C80 Series Programming Manual (Lathe System) (1/2)	IB-1501275	・G code programming for lathe system   ・Basic functions, etc.
	M800/M80/E80/C80 Series Programming Manual (Lathe System) (2/2)	IB-1501276	・G code programming for lathe system   ・Functions for multi-part system, high-accuracy function, etc.
	M800/M80/E80/C80 Series Programming Manual (Machining Center System) (1/2)	IB-1501277	・G code programming for machining center system   ・Basic functions, etc.
	M800/M80/E80/C80 Series Programming Manual (Machining Center System) (2/2)	IB-1501278	・G code programming for machining center system   ・Functions for multi-part system, high-accuracy function, etc.
	C80 Series Connection and Setup Manual	IB-1501452	・Detailed specifications of hardware   ・Installation, connection, wiring, setup (startup/adjustment)
	C80 Series Instruction Manual	IB-1501453	・Operation guide for NC   ・Explanation for screen operation, etc.
	C80 Series Maintenance Manual	IB-1501454	・Cleaning and replacement for each unit   ・Other items related to maintenance
	C80 Series Alarm/Parameter Manual	IB-1501560	・Alarms   ・Parameters
	MDS-E/EH Series Specifications Manual	IB-1501226	・Specifications of regenerative power modules
Drive system (servo/ spindle)	MDS-E/EH Series Instruction Manual	IB-1501229	・Handling of regenerative power modules
	MDS-EJ/EJH Series Specifications Manual	IB-1501232	・Specifications of resistor regeneration type units
	MDS-EJ/EJH Series Instruction Manual	IB-1501235	・Handling of resistor regeneration type units
	MDS-EM/EMH Series Specifications Manual	IB-1501238	・Specifications of multi-axis integrated, regenerative power modules
iQ-R	MDS-EM/EMH Series Instruction Manual	IB-1501241	・Handling of multi-axis integrated, regenerative power modules
	DATA BOOK	IB-1501252	・Specifications of servo drive unit, spindle drive unit, motor, etc.
	MELSEC iQ-R Module Configuration Manual	SH-081262	Outline of system configuration, specifications, installation, wiring, maintenance, etc.
	MELSEC iQ-R CPU Module User's Manual (Startup)	SH-081263	Outline of specifications, procedures before operation, troubleshooting, etc. for CPU module
	MELSEC iQ-R CPU Module User's Manual (Application)	SH-081264	Outline of memory, functions, devices, parameters, etc. for CPU module
	QCPU User's Manual (Hardware Design, Maintenance and Inspection)	SH-080483	Outline of specifications, necessary knowledge to configure the system and maintenance-related descriptions for Q series CPU module, etc.
GOT	GX Works3 Operating Manual	SH-081215	Outline of functions, programming, etc.
	GOT2000 Series User' s Manual (Hardware)	SH-081194	Outline of hardware such as part names, external dimensions, installation, wiring, maintenance, etc. of GOTs
	GOT2000 Series User' s Manual (Utility)	SH-081195	Outline of utilities such as screen display setting, operation method, etc. of GOTs
	GOT2000 Series User' s Manual (Monitor)	SH-081196	Outline of each monitor function of GOTs
	GOT2000 Series Connection Manual (Mitsubishi Electric Products)	SH-081197	Outline of connection types and connection method between GOT and Mitsubishi Electric connection devices
	GT Designer3 (GOT2000) Screen Design Manual	SH-081220	Outline of screen design method using screen creation software GT Designer3

Peripheral unit

Product	Model	Remarks
Dual signal module	Dual-signal modules	R173SXY
	Terminal block	FA-TBS40P
	Terminal block	FA-LTB40P
	Cable	FA-CBL□□FMV-M
Signal splitter	FCU7-HN387	Option (Necessary when manual pulse generator is used for two or three axes)
FL-net (OPCN-2) Interface module	ER-1FL2-T	10BASE-T, 100BASE-TX


Parts

Product	Model	Remarks
Manual pulse generator	UFO-01-Z29	5V specification
	HD60C	12V specification, for the operation board signal splitter connection, 12V power supply separately necessary
Encoder	OSE 1024-3-15-68	6000r/min, no straight type connector enclosed, new JIS key, 68 square flange
	OSE 1024-3-15-68-8	8000r/min, no straight type connector enclosed, 68 square flange
	OSE 1024-3-15-160	6000r/min, no straight type connector enclosed, new JIS key, 160 square flange
Grounding plate	Grounding plate D	With cable clamp A(2)
	Grounding plate E	With cable clamp B(1)

CASE STUDY

One CNC CPU controls up to seven part systems and 16 axes. Up to three CNC CPUs can be mounted on a single base. The C80 Series modules can control not only the machines in automobile parts production lines, but also various other machines.

Lathe system (two spindles and two turrets, equipped with workpiece loading robot)

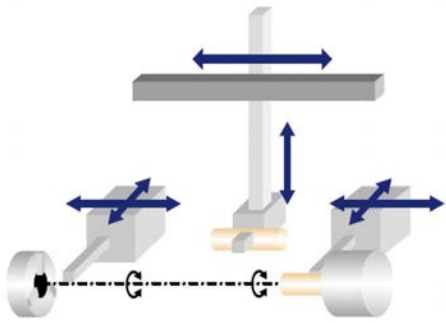


**[Point to adopt C80 Series]**

- Multi-part system control (up to 7 systems) enables independent control of lathe machining and work loading.
- iQ Platform-based robot control is supported.
- The system enables concurrent use of networks (field network, between controllers) are required in manufacturing lines.

**[Main functions]**

- Multi-part system control (start point designation timing synchronization, etc.)
- Machine group-based alarm stop
- Rapid traverse block overlap
- Connection to various networks

Grinder

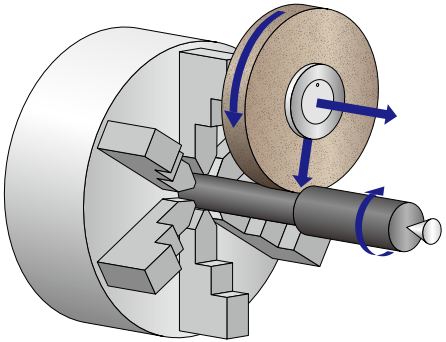


**[Point to adopt C80 Series]**

- GT Works3 helps design a variety of customized screens.
- Tool offset and tool life management functions support automation.
- Subprogram control allows modular part programming.

**[Main functions]**

- Tool offset and tool radius compensation
- Tool life management
- Subprogram control (up to eight nesting levels)

Multi-station machine

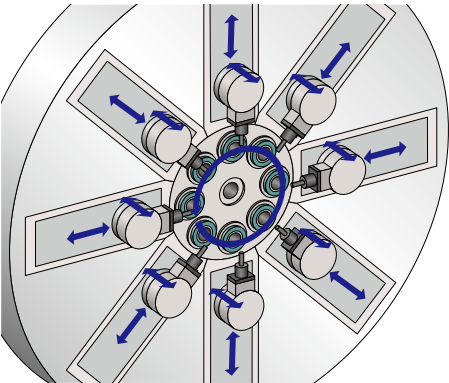

**[Point to adopt C80 Series]**

- C80 modules support up to three CPUs mounted, which enables multi-axis multi-part system control (up to 21 part-systems and 48 axes).
- A great number of tools can be managed through tool offset and tool life management functions.

**[Main functions]**

- Timing synchronization between part systems<sup>(\*)</sup>
- Start point designation timing synchronization<sup>(\*)</sup>
- Multi-part system program management<sup>(\*)</sup>
- Multi-part system simultaneous high-accuracy control<sup>(\*)</sup>
- Number of tool offset sets [machining center system: up to 400 sets, lathe system: up to 256 sets]
- Number of tool life management sets [machining center system: up to 400 sets, lathe system: up to 256 sets]

FUNCTIONAL SPECIFICATIONS

○Standard △Optional □Selection

class		C80		General explanation	
		Lathe system	Machining center system		
1 Control axes					
1 Control axes					
1	Number of basic control axes (NC axes)	○2	○3	The NC axis, spindle, and PLC axis are generically called the control axis. The NC axis can be manually or automatically operated using a machining program. The PLC axis can be controlled using a sequence program. The number of axes that is within the max. number of control axes, and that does not exceed the max. number given for the NC axis, spindle and PLC axis, can be used.	
2	Max. number of axes (NC axes + Spindles + PLC axes)	16	16		
1	Max. number of NC axes (in total for all the part systems)	16	16		
2	Max. number of spindles	7	7		
3	Max. number of PLC axes	8	8	The number of PLC axes available to be used as indexing axes.	
4	Max. number of PLC indexing axes	8	8		
5	Number of simultaneous contouring control axes	4	4	Number of axes with which simultaneous interpolation control is possible.	
6	Max. number of NC axes in a part system	8	8	Max. number of NC axes possible to control in the same part system.	
7	Axis name extension	○	○	The axis name (command axis name) to issue the absolute/incremental command to NC control axis can be expanded to two letters.	
2 Control part system					
1	Standard number of part systems	1	1	One part system is the standard.	
2	Max. number of part systems (main + sub)	○7	○7	Up to seven part systems.	
1	Max. number of main part systems	○7	○7		
2	Max. number of sub part systems	○2	—		
3 Control axes and operation modes					
2	Memory mode	○	○	Machining programs stored in the memory of the CNC module are run.	
3	MDI mode	○	○	MDI data stored in the memory of the CNC unit are executed.	
4	High-speed program server mode			This function allows high-speed transfer of machining programs from the FTP server to the large-capacity buffer memory in CNC CPU via Ethernet to execute the program.	
3	FTP high-speed program server mode	△	△		
2 Input command					
1 Data increment					
1	Least command increment			The data increment handled in the controller includes the input setting increment and command increment. Each type is set with parameters.	
	Least command increment 1μm	○	○	Possible to command in increments of 0.001mm (linear axis) and 0.001° (rotary axis).	
	Least command increment 0.1μm	○	○	Possible to command in increments of 0.0001mm (linear axis) and 0.0001° (rotary axis).	
2	Least control increment			The least control increment determines the CNC's internal operation accuracy.	
	Least control increment 0.01μm (10nm)	○	○	Possible to control in increments of 0.00001mm (linear axis) and 0.00001° (rotary axis).	
	Least control increment 0.001μm (1nm)	○	○	Possible to control in increments of 0.000001mm (linear axis) and 0.000001° (rotary axis).	
3	Indexing increment	○	○	This function limits the command value for the rotary axis.	
3 Positioning / Interpolation					
1 Positioning					
1	Positioning	○	○	This function carries out positioning at high speed using a rapid traverse rate with the travel command value given in the program.	
2	Unidirectional positioning	—	△	The G code command always moves the tool to the final position in the direction determined by parameters.	
2 Linear / Circular interpolation					
1	Linear interpolation	○	○	Linear interpolation is a function that moves a tool linearly by the travel command value supplied in the program at the cutting feedrate designated by the F code.	
2	Circular interpolation (Center / Radius designation)	○	○	This function moves a tool along a circular arc on the plane selected by the travel command value supplied in the program.	
3	Helical interpolation	○	○	With this function, any two of three axes intersecting orthogonally are made to perform circular interpolation while the third axis performs linear interpolation in synchronization with the arc rotation. This control can be exercised to machine large-diameter screws or 3-dimensional cams.	
4	Spiral / Conical interpolation	—	△	This function interpolates arcs where the start point and end point are not on the circumference of the same circle into spiral shapes.	
5	Cylindrical interpolation	△	△	This function transfers the shape that is on the cylinder's side surface (shape yielded by the cylindrical coordinate system) onto a plane, and when the transferred shape is designated in the program in the form of plane coordinates, the shape is converted into a movement along the linear and rotary axes of the original cylinder coordinates, and the contours are controlled by means of the CNC unit during machining.	
6	Polar coordinate interpolation	△	△	This function converts the commands programmed by the orthogonal coordinate axes into linear axis movements (tool movements) and rotary axis movements (workpiece rotation) to control the contours. It is useful for cutting linear cutouts on the outside diameter of the workpiece, grinding cam shafts, etc.	
7	Milling interpolation	△	—	When a lathe with linear axes (X, Z axes) and rotary axis (C axis) serving as the control axes is to perform milling at a workpiece end face or in the longitudinal direction of the workpiece, this function uses the hypothetical axis Y, which is at right angles to both the X and Z axes, to enable the milling shape to be programmed as the X, Y and Z orthogonal coordinate system commands.	
3 Curve interpolation					
3	Spline interpolation (G05.1Q2 / G61.2)	—	△	This function automatically generates spline curves that smoothly pass through rows of dots designated by a fine-segment machining program, and performs interpolation for the paths along the curves. This enables high-speed and high-accuracy machining.	
4 Feed					
5 Thread cutting					
1	Thread cutting (Lead / Thread number designation)	○	△	Thread cutting with a designated lead can be performed. Inch threads are cut by designating the number of threads per inch with the E address.	
2	Variable lead thread cutting	○	—	By commanding the lead increment/decrement amount per thread rotation, variable lead thread cutting can be performed.	
3	Synchronous tapping			* With digital I/F spindle	
1	Synchronous tapping cycle	○	○	This function performs tapping through synchronized control of the spindle and servo axis. This eliminates the need for floating taps and enables tapping to be conducted at a highly accurate tapping depth.	
2	Pecking tapping cycle	△	△	The load applied to the tool can be reduced by designating the depth of cut per pass and cutting the workpiece to the hole bottom with a multiple number of passes.	
3	Deep-hole tapping cycle	△	△	In the deep-hole tapping, the load applied to the tool can be reduced by designating the depth of cut per pass and cutting the workpiece to the hole bottom with a multiple number of passes.	
4	Multiple spindle synchronous tapping	△	△	This function enables two or more spindles to perform synchronous tapping at a time, thereby improving the tapping efficiency.	
4	Chamfering	○	—	Chamfering can be enabled during the thread cutting cycle by using external signals.	
6	Circular thread cutting	—	—	Circular thread in which the lead is in longitudinal direction can be cut.	
8	High-speed synchronous tapping (OMR-DD)	○	○	The servo axis directly detects and compensates the spindle's delay in tracking by using the communication between drive units over the high-speed optical servo network. By minimizing the synchronization error, the accuracy of the synchronous tapping is increased.	
11	Thread cutting override	△	—	The thread cutting feedrate can be changed by changing the spindle override depending on rough cutting, finish machining, etc.	
12	Variable feed thread cutting	△	—	This function changes the cutting feedrate by the spindle override at the time of the thread cutting. The machining condition during thread cutting can be changed.	

(\*) Specifications for each CNC CPU.



FUNCTIONAL SPECIFICATIONS

○Standard △Optional □Selection

class		C80		General explanation	
		Lathe system	Machining center system		
5 Program memory / editing					
1 Memory capacity					
1	Memory capacity (number of programs stored)				Machining programs are stored in the NC memory. (Note) For a multi-part system, the specifications shown here is the total for all part systems.
	500kB [1280m] (1000 programs)		○	○	
	1000kB [2560m] (2000 programs)		△	△	
	2000kB [5120m] (2000 programs)		△	△	
2 Editing					
1	Program editing		○	○	This function enables program editing such as correction, deletion and addition.
2	Background editing		○	○	This function enables one machining program to be created or edited while another program is running.
3	Buffer correction		○	○	During automatic operation (memory) or MDI operation, this function initiates single block stop and enables the next command to be corrected or changed. When a program error has occurred, the function enables the block in which the error occurred to be corrected and operation to be resumed without having to perform NC resetting.
5	Multi-part system simultaneous program editing		○	—	When an operation to open a machining program in the NC memory is performed on the edit screen, machining programs are opened in the right and left areas at the same time; the specified machining program of the displayed part system in the edit area being selected and the machining program of another part system with the same name in the unselected edit area.
6	Special program editing display for synchronization between part systems		△	—	When the left and right edit areas are displaying the same named programs of different part systems stored on the NC memory, the display is switched to the synchronized display of the left- and right- side programs aligned using the timing synchronization symbols.
6 Operation and display					
1 Structure of operation / display panel					
11	GOT (GOT2000 Series GT27 / GT25 12.1 / 10.4 / 8.4 / 5.7)		○	○	Select a GOT in its lineup. For details, refer to catalogs : "GOT2000 series".
2 Operation methods and functions					
1	Operation input		○	○	In addition to the method of directly inputting numeric data, a method to input the operation results using four basic arithmetic operators and function symbols can be used for specific data settings.
2	Absolute value / Incremental value setting		○	○	When setting the data, the absolute/incremental setting can be selected from the menu.
3	Multiple display connection		○(GOT)	○(GOT)	Using an Ethernet hub, one CNC module can be connected to and switched between up to eight displays. (Note that the max. number of connectable displays is limited depending on the machine operation panel specifications.)
4	Common display to multiple NCs		○(GOT)	○(GOT)	Using an Ethernet hub, one display can be connected to and switched between up to 64 CNC modules. (Note that the max. number of connectable displays is limited depending on the machine operation panel specifications.)
5	Displayed part system switch		○	○	The part system displayed on the screen can be changed.
6	Menu list		○	○	The menu list function displays the menu configuration of each screen as a list, making it possible to directly select the menu for other screens.
7	Display switch by operation mode		○	○	The screen display changes when the screen mode selection switch is changed.
8	External signal display switch		○	○	The screen display changes with the signal from PLC.
9	Screen saver		○(GOT)	○(GOT)	The screen saver function protects the display unit by turning the backlight OFF after the length of time specified in a parameter.
10	Parameter guidance		○	○	This function displays the details of the parameters or the operation methods according to the state of the screen currently displayed.
11	Alarm guidance		○	○	Guidance is displayed for the alarm currently issued.
14	Screenshot capture		○(GOT)	○(GOT)	This function allows to output a bitmap file of a screen displayed on the setting and display unit to USB memory or SD card.
15	User selectable menu configuration		○	○	This function allows to change the display order of the main menu in the "Monitor", "Setup" and "Edit" screens, and to change display / non-display selection.
19	MTB selectable menu configuration		○	○	Menu items on the "Monitor", "Setup" and "Edit" screens (of MITSUBISHI standard format) can be moved within a screen or hidden as desired. The custom screen menu items added by machine tool builders, on the contrary, cannot be moved or hidden.
8 Spindle, Tool and Miscellaneous functions					
1 Spindle functions (S)					
1	Spindle control functions				The spindle rotation speed is determined in consideration of the override and gear ratio for the S command given in automatic operation or with manual numerical commands, and the spindle is rotated.
	6	Spindle-mode servo motor control	△	△	This function controls a spindle using the combination of servo motor and servo drive unit (MDS-E Series) which controls NC axis.
15	Multiple spindle synchronization set control		○	○	By setting the parameter, spindle synchronization I, tool spindle synchronization I/AB (spindle-spindle, polygon), tool spindle synchronization II (hobbing) and spindle superimposition control can be executed simultaneously for multiple sets of spindles.
11 Operation support functions					
4 Interrupt operation					
16	Machining interruption		△	△	Machining interruption is a function which enables interrupt operations while a program is normally executed.
12 Program support functions					
1 Machining method support functions					
7	Axis control				
	1	Chopping			
1	Chopping		△	△	This function continuously raises and lowers the chopping axis independently of program operation. During the grinding operation, chopping can produce a better surface accuracy than using abrasive grain.
8	Multi-part system control				
3	Mixed control				
	2	Arbitrary axis exchange control	△	△	An arbitrary axis can be exchanged freely across part systems in the multiple part systems. The machining can be free by exchanging an axis which can be commanded for machining programs in each part system.
11	High-speed parts machining				
1	Rapid traverse block overlap		△	△	This function enables the next block to start (overlap) without waiting for positioning (G00) or reference position return (G28/G30). Consequently, cycle time of machining can be reduced.
3 High-speed and high-accuracy functions [kBPM: k Block per Minute]					
3	SSS control		—	△	With SSS (Super Smooth Surface) control, the large area path information is used instead of just the angle between the blocks. Thus, optimum speed control that is not adversely affected by minute steps or waviness is possible. This enables machining with a fewer scratches and streaks on the cutting surface compared to the normal high-accuracy control function. Multiple part systems simultaneous high-accuracy function is required to conduct the SSS control in the second or following part systems.
	4 Tolerance control		—	△	This function enables the smooth operation within the tolerance error range. The desired machining result can be obtained with simple parameter adjustment.

○Standard △Optional □Selection

class	C80		General explanation
	Lathe system	Machining center system	
13 Machine accuracy compensation			
1 Static accuracy compensation			
1 Backlash compensation	○	○	This function compensates the error (backlash) produced when the direction of the machine system is reversed.
2 Memory-type pitch error compensation [sets]	○10	○10	Machine accuracy can be improved by compensating the errors in the screw pitch intervals among the mechanical errors (production errors, wear, etc.) of the feed screws.
3 Memory-type relative position error compensation	○	○	Machine accuracy can be improved by compensating the relative error between machine axes, such as a production error or aging.
4 External machine coordinate system compensation	△	△	The coordinate system can be shifted by inputting a compensation amount from the PLC. This compensation amount will not appear on the counters (all counters including machine position).
5 Circular error radius compensation	△	△	With commands designated during arc cutting, the function compensates movement toward the inside of the arcs caused by a factor such as servo delay.
6 Ball screw thermal expansion compensation	△	△	This compensates the axis feed error caused by a ball screw's thermal expansion, etc. using the values set by the PLC.
8 Position-dependent gradually increasing-type backlash compensation	△	△	With this function, the gradually increasing-type lost motion which depends on the distance from the point where the machine movement direction is reversed can be compensated by controlling the variation of backlash compensation amount according to the distance from the direction reversal point.
9 Two-way pitch error compensation	△	△	Two-way pitch error compensation function is used to compensate the pitch error in each direction by setting the pitch error compensation amount when moving in the positive and negative direction.
2 Dynamic accuracy compensation			
1 Smooth high-gain (SHG) control	○	○	This is a high-response and stable position control method using the servo system. SHG control realizes an approximately three-fold position loop gain compared to the conventional control method.
2 Dual feedback	○	○	Use position feedback with a motor-side encoder in ranges with high acceleration to enable stable control. In ranges with low acceleration, use position feedback with the machine-side encoder (scale). This will make it possible to increase the position loop gain. A machine-side encoder (scale) is separately required.
3 Lost motion compensation	○	○	This function compensates the error in protrusion shapes caused by lost motion at the arc quadrant changeover section during circular cutting.
4 OMR II (Backlash with filter)	△	△	The OMR (Optimal Machine Response) control function estimates the machine or motor model (moment of inertia, cone friction, viscosity coefficient, etc.) that can cause a path error (deviation of the actual tool path from the programmed path). High-accuracy machining is achieved by carrying out feed forward control based on that model. This allows error caused by quadrant protrusions during circular interpolation or quadrants on the inner side of the path to be greatly reduced. OMR-II is a function that focuses on the quadrant protrusions, and improves the path error with this. Quadrant path compensation is included in OMR-II.
6 OMR-FF	△	△	OMR-FF control enables fine control by generating feed forward inside the drive unit and can realize the strict feedback control to the program command than the conventional high-speed accuracy control.
15 Safety and maintenance			
4 Maintenance and troubleshooting			
12 Backup / Restore	○	○	This function stores the setting information (sequence programs, parameters and the setting values, etc.) of a connected device to the installed data storage in GOT, and restores those data to the device as needed.
5 Functional safety			
2 Smart Safety observation			
1 Safety-related I/O observation	△	△	Using the dual circuits for processing signals input/output to/from the machine (safety signal compare sequence) and dual execution of safety signal process logic made by users (safety PLC), if one circuit has broken down, the other circuit can detect errors, which improves the safety of signal process.
2 Emergency stop observation	△	△	Emergency stop signal is doubled and observed to see whether there is any error. When one emergency stop signal is in open state, the whole system can be set in emergency stop condition.
3 Drive safety function			
1 SLS (Safely-Limited Speed)	△	△	Axis speed (command speed, FB speed) is observed doubly to see whether the speed exceeds the safe speed.
2 SLP (Safely-Limited Position)	△	△	Axis absolute position (command position, FB position) is observed doubly to see whether the position exceeds the safe position range.
3 SOS (Safe Operating Stop)	△	△	Axis stop speed (command speed, FB speed) is observed doubly whether the speed exceeds the safe stop speed. Axis stop position (command position, FB position) is observed doubly whether the position exceeds the safe stop position range. Observe axis stop position deviation (difference between command position and FB position) doubly to see whether the deviation exceeds the safe stop position deviation.
4 SSM (Safe Speed Monitor)	△	△	This function uses the safety signals to inform that the axis speed (command speed, FB speed) is equal to or below the safe speed.
5 SBC / SBT (Safe Brake Control / Safe Brake Test)	△	△	The brakes connected to motors are activated by this function. Because there are two circuits for activating the brakes, one circuit can activate the brakes even when the other circuit is broken down. Furthermore, Safe Brake Test (SBT) can diagnose the circuits for activating the brakes and the effectiveness of the brakes (deterioration due to abrasion, etc.).
6 SCA (Safe Cam)	△	△	This function uses the safety signals to inform that the axis absolute position (command position, FB position) is within the range of safe position.
7 SS1 / SS2 (Safe Stop)	△	△	[Safe stop 1 (SS1)] STO function is activated after an axis is decelerated and the speed (command speed, FB speed) becomes equal to or below the safe stop speed. [Safe stop 2 (SS2)] SOS function is activated after an axis is decelerated and the speed (command speed, FB speed) becomes equal to or below the safe stop speed.
8 STO (Safe Torque Off)	△	△	This function shuts OFF power supply to axes. Because there are two power shutoff circuits, one circuit can shut OFF the power supply even when the other circuit is broken down.
9 SCN (Safety Communication Network)	△	△	This function performs safety communication between master station and local station using CC-Link IE field network.
17 Machine support functions			
6 External PLC link			
1 CC-Link (Master / Local)	△ (MELSEC)	△ (MELSEC)	Refer to manuals of each unit of MITSUBISHI Programmable Controller "MELSEC IQ-R series" for information on the function and the performance.
2 PROFIBUS-DP (Master)	△ (MELSEC)	△ (MELSEC)	Refer to manuals of each unit of MITSUBISHI Programmable Controller "MELSEC IQ-R series" for information on the function and the performance.
3 CC-Link IE Field network (Master / Local)	△ (MELSEC)	△ (MELSEC)	Refer to manuals of each unit of MITSUBISHI Programmable Controller "MELSEC IQ-R series" for information on the function and the performance.
4 PROFINET	△ (MELSEC)	△ (MELSEC)	Refer to manuals of each unit of MITSUBISHI Programmable Controller "MELSEC IQ-R series" for information on the function and the performance.
5 EtherNet/IP	△ (MELSEC)	△ (MELSEC)	Refer to manuals of each unit of MITSUBISHI Programmable Controller "MELSEC IQ-R series" for information on the function and the performance.
8 FL-net	△ (MELSEC)	△ (MELSEC)	Refer to manuals of each unit of MITSUBISHI Programmable Controller "MELSEC IQ-R series" for information on the function and the performance.
9 DeviceNet (Master)	△ (MELSEC)	△ (MELSEC)	Refer to manuals of each unit of MITSUBISHI Programmable Controller "MELSEC IQ-R series" for information on the function and the performance.
7 Installing S/W for machine tools			
4 APLC release (Note 1)	△	△	APLC (Advanced Programmable Logic Controller) release is a function that allows the user-generated C language module to be called from the NC. Control operations that are difficult to express in a sequence program can be created with the C language.
10 GOT2000 screen design tool GT Works3	○	○	This integrated software is used to create professional screen designs for GOTs.
8 Others			
2 CNC remote operation tool			
1 NC Monitor2 (Note 1)	○	○	NC Monitor2 is a PC software tool that monitors information in the NC unit connected with the Ethernet.
2 NC Explorer (Note 3)	○	○	NC Explorer is a software tool to operate the machining data files of each NC unit connected with a host personal computer by Ethernet connection from the Explorer on the host personal computer.
3 Automatic operation lock	○	○	Automatic operation lock function prevents the falsification of APLC (C language module) by a third party.
4 Power consumption computation	○	○	Present power consumption and accumulated power consumption can be acquired with this function. The present power consumption notifies the instantaneous power consumption and the accumulated power consumption notifies the integrated value of the present power consumption.
6 GOT Window	○	○	This is the interface to display the variety of NC data on GOT connected to the CNC CPU. This reads out the running machining program No., the running machining program and the coordinate values, etc. by the device read command.
7 Log Viewer	○	○	This function enables the recorded data by the data sampling function of the NC to display with a graph on the GOT, and to store the data as a file.

(Note 1) Please contact us to purchase this tool.  
(Note 3) This tool is free of charge. Please contact us.  
Refer to the specifications manuals for details.

# GLOBAL SALES & SERVICE NETWORK

AMERICA

**MITSUBISHI ELECTRIC AUTOMATION INC. (AMERICA FA CENTER)**  
**HQ and Central Region Service Center (Chicago)**  
500 CORPORATE WOODS PARKWAY, VERNON HILLS, ILLINOIS 60061,U.S.A.  
TEL: +1-847-478-2500 / FAX: +1-847-478-2650

- Minneapolis, MN Service Satellite
- Detroit, MI Service Satellite
- Grand Rapids, MI Service Satellite
- Cleveland, OH Service Satellite
- St. Louis, MO Service Satellite
- Indianapolis, IN Service Satellite

**South/East Region Service Center (Georgia)**  
1845 SATELLITE BOULEVARD STE. 450, DULUTH, GEORGIA 30097, U.S.A.  
TEL +1-678-258-4529 / FAX +1-678-258-4519

- Charleston, SC Service Satellite
- Charlotte, NC Service Satellite
- Raleigh, NC Service Satellite
- Dallas, TX Service Satellite
- Houston, TX Service Satellite
- Hartford, CT Service Satellite
- Knoxville, TN Service Satellite
- Nashville, TN Service Satellite
- Huntsville, AL Satallite
- Pittsburg, PA Service Satellite
- Tampa, FL Service Satellite
- Miami, FL Satellite
- Lafayette, LA Service Satellite
- Allentown, PA Satelite

**Western Region Service Center (California)**  
5900-B KATELLA AVE. - 5900-A KATELLA AVE. CYPRESS, CALIFORNIA 90630, U.S.A.  
TEL: +1-714-699-2625 / FAX: +1-847-478-2650

- San Francisco, CA Satellite
- Seattle, WA Service Satellite
- Denver, CO Service Satellite

**Canada Region Service Center (Toronto)**  
4299 14TH AVENUE MARKHAM, ONTARIO L3R OJ2, CANADA  
TEL: +1-905-475-7728 / FAX: +1-905-475-7935

- Edmonton, AB Service Satellite
- Montreal, QC Service Satellite

**Mexico Region Service Center (Queretaro)**  
Parque Tecnológico Innovación Querétaro, Lateral Carretera Estatal 431, Km 2+200, Lote 91 Modulos 1 y 2 Hacienda la Machorra, CP 76246, El Marqués, Querétaro, México  
TEL: +52-442-153-6050

- Monterrey, NL Service Satellite
- Mexico City, DF Service Satellite

BRAZIL

**MITSUBISHI ELECTRIC DO BRASIL COMÉRCIO E SERVIÇOS LTDA.**  
**Votorantim Office**  
AV. GISELE CONSTANTINO,1578, PARQUE BELA VISTA, VOTORANTIM-SP, BRAZIL CEP:18.110-650  
TEL: +55-15-3023-9000

- Blumenau, Santa Catarina Office

EUROPE

**MITSUBISHI ELECTRIC EUROPE B.V.**  
**European Service Headquarters (Dusseldorf, GERMANY)**  
Mitsubishi-Electric-Platz 1 40882 RATINGEN, GERMANY  
TEL: +49-2102-486-5000 / FAX: +49-2102-486-5910

**South Germany Service Center (Stuttgart)**  
SCHELMENWASENSTRASSE 16-20, 70567 STUTTGART, GERMANY  
TEL: +49-711-770598-123 / FAX: +49-711-770598-141

**France Service Center (Paris)**  
2 RUE DE L'UNION, 92565 RUEIL-MALMAISON CEDEX, FRANCE  
TEL: +33-1-41-02-83-13 / FAX: +33-1-49-01-07-25

**France Service Satellite (Lyon)**  
240, ALLEE JACQUES MONOD 69800 SAINT PRIEST FRANCE  
TEL: +33-1-41-02-83-13 / FAX: +33-1-49-01-07-25

**Italy Service Center (Milan)**  
VIA ENERGY PARK 14, VIMERCATE 20871 (MB) ITALY  
TEL: +39-039-6053-342 / FAX: +39-039-6053-206

**Italy Service Satellite (Padova)**  
VIA G. SAVELLI, 24 - 35129 PADOVA, ITALY  
TEL: +39-039-6053-342 / FAX: +39-039-6053-206

**U.K. Service Center**  
TRAVELLERS LANE, HATFIELD, HERTFORDSHIRE, AL10 8XB, U.K.  
TEL: +44-1707-288-780 / FAX: +44-1707-278-695

**Spain Service Center**  
CTRA, RUBI, 76-80 8174 SAINT CUGAT DEL VALLES, BARCELONA, SPAIN  
TEL: +34-935-65-2236 / FAX: +34-935-89-1579

**Poland Service Center**  
UL.KRAKOWSKA 50, 32-083 BALICE, POLAND  
TEL: +48-12-347-6500 / FAX: +48-12-630-4701

**Hungary Service Center**  
**MITSUBISHI ELECTRIC EUROPE B.V. HUNGARIAN BRANCH**  
BUDAÖRS OFFICE PARK, SZABADSÁG ÚT 117., 2040 BUDAÖRS, HUNGARY  
TEL: +36-70-433-2263

**Turkey Service Center**  
**MITSUBISHI ELECTRIC TURKEY ELEKTRİK ÜRÜNLERİ A.Ş**  
SERIFALI MAHALLESİ KALE SOKAK. NO.41 34775 UMRANIYE, ISTANBUL, TURKEY  
TEL: +90-216-969-2500 / FAX: +90-216-661-44-47

**Czech Republic Service Center**  
**MITSUBISHI ELECTRIC EUROPE B.V. PRAGUE OFFICE**  
Pekařská 621/7, 155 00 PRAHA 5, CZECH REPUBLIC  
TEL: +420-734-402-587

**Sweden Service Center**  
HAMMARBACKEN 14, P.O.BOX 750 SE-19127, SOLLENTUNA, SWEDEN  
TEL: +46-8-6251200 / FAX: +46-8-6251014

**Bulgaria Service Center**  
**AKHNATON Ltd. (Service Partner)**  
4 ANDREJ LJAPCHEV BLVD. POB 21, BG-1756 SOFIA, BULGARIA  
TEL: +359-2-8176009 / FAX: +359-2-9744061

**Ukraine Service Center (Kiev)**  
**CSC Automation Ltd. (Service Partner)**  
4 B, YEVHENA SVERSTYUKA STR., 02002 KIEV, UKRAINE  
TEL: +380-44-494-3344 / FAX: +380-44-494-3366

**South Africa Service Center**  
**Adroit Technologies (Service Partner)**  
20 WATERFORD OFFICE PARK, WATERFORD DRIVE, CNR OF WITKOPPEN ROAD, FOURWAYS JOHANNESBURG SOUTH AFRICA  
TEL: +27-11-658-8100 / FAX: +27-11-658-8101

ASEAN

**MITSUBISHI ELECTRIC ASIA PTE. LTD. (ASEAN FA CENTER)**  
**Singapore Service Center**  
307 ALEXANDRA ROAD MITSUBISHI ELECTRIC BUILDING SINGAPORE 159943  
TEL: +65-6473-2308 / FAX: +65-6476-7439

PHILIPPINES

**MELCO FACTORY AUTOMATION PHILIPPINES INC.**  
**Head Office**  
128 LOPEZ RIZAL STREET, BRGY., HIGHWAY HILLS, MANDALUYONG CITY, MM PHILIPPINES 1550  
TEL: +63-2-8256-8042 / FAX: +632-8637-2294

**Philippines Service Center**  
KM.23 WEST SERVICE ROAD SSH, CUPANG, MUNTINLUPA CITY, PHILIPPINES  
TEL: +63-2-8807-0420 / FAX: +63-2-8842-5202

VIETNAM

**MITSUBISHI ELECTRIC VIETNAM CO., LTD.**  
**Vietnam Ho Chi Minh Service Center**  
11TH & 12TH FLOOR, VIETTEL TOWER B, 285 CACH MANG THANG 8 STREET, WARD 12, DISTRICT 10, HO CHI MINH CITY, VIETNAM  
TEL: +84-28-3910-5945 / FAX: +84-28-3910-5947

**Vietnam Hanoi Service Center**  
14TH FLOOR, CAPITAL TOWER, 109 TRAN HUNG DAO STREET, CUA NAM WARD, HOAN KIEM DISTRICT, HA NOI CITY, VIETNAM  
TEL: +84-24-3937-8075 / FAX: +84-24-3937-8076

INDONESIA

**PT. MITSUBISHI ELECTRIC INDONESIA**  
**Indonesia Service Center (Cikarang)**  
JL. KENARI RAYA BLOK G2-07A, DELTA SILICON 5, LIPPO CIKARANG - BEKASI 17550, INDONESIA  
TEL: +62-21-2961-7797 / FAX: +62-21-2961-7794

MALAYSIA

**MITSUBISHI ELECTRIC SALES MALAYSIA SDN. BHD.**  
**Malaysia Service Center (Kuala Lumpur Service Center)**  
LOT 11, JALAN 219, P.O BOX 1036, 46860 PETALING JAYA, SELANGOR DARUL EHSAN, MALAYSIA  
TEL: +60-3-7626-5032

**Johor Bahru Service Center**  
9, Jalan Perjiranan 4/6, Bandar Dato Onn, 81100 Johor.  
TEL: 07-3642250 / 2256

**Pulau Pinang Service Center**  
25-G, Pusat Perniagaan Perdana Jaya, Jalan Permatang Rawa, 14000 Bukit Mertajam, Pulau Pinang  
TEL: +60-4-510-1838 / Fax: +60-4-510-1835

THAILAND

**MITSUBISHI ELECTRIC FACTORY AUTOMATION (THAILAND) CO., LTD.**  
**Thailand Service Center (Bangkok)**  
101, TRUE DIGITAL PARK OFFICE, 5TH FLOOR, SUKHUMVIT ROAD, BANGCHAK, PHRA KHANONG, BANGKOK, 10260 THAILAND  
TEL: +66-2-092-8600 / FAX: +66-2-043-1231-33

INDIA

**MITSUBISHI ELECTRIC INDIA PVT., LTD.**  
**Service Head office and South India Service Center (Bangalore)**  
CNC eXperience Park, PLOT NO. 57/A, PEENYA PHASE 3, PEENYA INDUSTRIAL AREA, BANGALORE 560058, KARNATAKA, INDIA  
TEL : +91-80-4655-2121

- Chennai Service Satellite
- Coimbatore Service Satellite
- Hyderabad Service Satellite

**North India Service Center (Gurgaon)**  
PLOT 517, GROUND FLOOR, UDYOG VIHAR PHASE-III, GURUGRAM 122008, HARYANA, INDIA  
TEL : +91-124-463-0300

- Ludhiana Service Satellite
- Panthnagar Service Satellite
- Delhi Service Satellite
- Jamshedpur Service Satellite
- Manesar Service Satellite

**West India Service Center (Pune)**  
ICC-Devi GAURAV TECHNOLOGY PARK, UNIT NO.402, FOURTH FLOOR, NORTH WING, SURVEY NUMBER 191-192 (P), NEXT to INDIAN CARD CLOTHING COMPANY Ltd, OPP. VALLABH NAGAR, PIMPRI, PUNE- 411 018, MAHARASHTRA, INDIA  
TEL : +91-20-6819-2274

- Kolhapur Service Satellite
- Aurangabad Service Satellite
- Mumbai Service Satellite

**West India Service Center (Ahmedabad)**  
204-209, 2ND FLOOR, 31FIVE, CORPORATE ROAD PRAHLADNAGAR, AHMEDABAD -380015, GUJARAT, INDIA  
TEL : +91-79-6777-7888

- Rajkot Service Satellite

CHINA

**MITSUBISHI ELECTRIC AUTOMATION (CHINA) LTD. (CHINA FA CENTER)**  
**CNC Call Center**  
TEL: +86-400-921-5130

**Shanghai Service Center**  
NO.1386 HONG QIAO ROAD, CHANG NING QU, SHANGHAI 200336, CHINA  
TEL: +86-21-2322-3030 / FAX: +86-21-2322-3000\*8422

- Qingdao Service Center
- Suzhou Service Center
- Wuhan Service Center
- Ningbo Service Center
- Hefei Service Center
- Beijing Service Center
- Tianjin Service Center
- Xian Service Center
- Dalian Service Center
- Chengdu Service Center

**Shenzhen Service Center**  
LEVEL8, GALAXY WORLD TOWER B, 1 YABAO ROAD, LONGGANG DISTRICT, SHENZHEN 518129, CHINA  
TEL: +86-755-2399-8272 / FAX: +86-755-8229-3686

- Dongguan Service Center
- Xiamen Service Center

KOREA

**MITSUBISHI ELECTRIC AUTOMATION KOREA CO., LTD. (KOREA FA CENTER)**  
**Korea Seoul Service Center**  
8F GANGSEO HANGANG XI-TOWER A, 401 YANGCHEON-RO, GANGSEO-GU, SEOUL 07528 KOREA  
TEL: +82-2-3660-9631 / FAX: +82-2-3664-8668

**Korea Daegu Service Center**  
2F KT BLDG. 8, HOGUK-RO, BUK-GU, DAEGU 41518, KOREA  
TEL: +82-53-382-7401 / FAX: +82-53-382-7412

**Korea Changwon Technical Center**  
#205, 888, CHANGWON-DAERO, SEONGSAN-GU, CHANGWON-SI, GYEONGSANGNAM-DO, 51532, KOREA  
TEL: +82-55-261-5559 / FAX: +82-55-261-5558

TAIWAN

**MITSUBISHI ELECTRIC TAIWAN CO., LTD. (TAIWAN FA CENTER)**  
**Taiwan Taichung Service Center**  
NO 8-1, GONGYEQU 16TH RD., XITUN DIST., TAICHUNG CITY 40768, TAIWAN  
TEL: +886-4-2359-0688 / FAX: +886-4-2359-0689

**Taiwan Taipei Service Center**  
11F, NO.88, SEC.6, ZHONGSHAN N. RD., SHILIN DIST., TAIPEI CITY 11155, TAIWAN  
TEL: +886-2-2833-5430 / FAX: +886-2-2833-5433

**Taiwan Tainan Service Center**  
11F-1, NO.30, ZHONGZHENG S. RD., YONGKANG DIST., TAINAN CITY 71067, TAIWAN  
TEL: +886-6-252-5030 / FAX: +886-6-252-5031

OCEANIA

**MITSUBISHI ELECTRIC AUSTRALIA PTY. LTD.**  
**Oceania Service Center**  
348 VICTORIA ROAD, RYDALMERE, N.S.W. 2116 AUSTRALIA  
TEL: +61-2-9684-7269 / FAX: +61-2-9684-7245



MEMO

Lined area for writing on page 31.

MEMO

Lined area for writing on page 32.

WARRANTY

Please confirm the following product warranty details before using MITSUBISHI ELECTRIC CNC.

1. Warranty Period and Coverage

Should any fault or defect (hereafter called "failure") for which we are liable occur in this product during the warranty period, repair services shall be provided at no cost through the distributor from which the product was purchased or through a Mitsubishi Electric service provider. Note, however, that this does not apply if the customer was informed prior to purchasing the product that the product is not covered under warranty. Also note that we are not responsible for any on-site readjustment and/or trial run that may be required after a defective unit is replaced.

[Warranty Term]

The term of warranty for this product shall be twenty-four (24) months from the date of delivery of the product to the end user, provided the product purchased from Mitsubishi Electric or a distributor in Japan is installed in Japan (but in no event longer than thirty (30) months, including distribution time after shipment from Mitsubishi Electric or a distributor).

Note that, in the case where the product purchased from Mitsubishi Electric or a distributor in or outside Japan is exported and installed in any country other than where it was purchased, please refer to "2. Service in Overseas Countries" below.

[Limitations]

- (1)The machine tool builder is requested to conduct an initial failure diagnosis, as a general rule. The diagnosis may also be carried out by Mitsubishi Electric or our service provider for a fee at the machine tool builder's request.
- (2)This warranty applies only when the conditions, method, environment, etc., of use are in compliance with the terms, conditions and instructions that are set forth in the instruction manual, user's manual, and the caution label affixed to the product, etc.
- (3)Even during the term of warranty, repair costs will be charged to the customer in the following cases:
  - (a) a failure caused by improper storage or handling, carelessness or negligence, etc., or a failure caused by a problem with the customer's hardware or software

- (b) a failure caused by any alteration, etc., to the product made by the customer without Mitsubishi Electric's approval
- (c) a failure which could have been avoided if the customer's equipment in which this product is incorporated had been equipped with a safety device required by applicable laws or has any function or structure considered indispensable in the light of industrial common sense
- (d) a failure which could have been avoided if consumable parts designated in the instruction manual, etc. had been duly maintained and replaced
- (e) any replacement of consumable parts (including the battery, relay and fuse)
- (f) a failure caused by external factors such as inevitable accidents, including without limitation fire and abnormal fluctuation of voltage, and acts of God, including without limitation earthquakes, lightning, and natural disasters
- (g) a failure which could not have been foreseen under technologies available at the time of shipment of this product from Mitsubishi Electric
- (h) any other failures which are not attributable to Mitsubishi Electric or which the customer acknowledges are not attributable to Mitsubishi Electric

2. Service in Overseas Countries

If the customer installs a product purchased from Mitsubishi Electric in a machine or equipment and exports it to any country other than where it was purchased, the customer may sign a paid warranty contract with our local FA center.

This applies in the case where the product purchased from us in or outside Japan is exported and installed in any country other than where it was purchased.

For details please contact the distributor from which the product was purchased.

3. Exclusion of Responsibility for Compensation against Loss of Opportunity, Secondary Loss, etc.

Regardless of the gratis warranty term, Mitsubishi Electric shall not be liable for compensation for:

- (1)Damage arising from any cause found not to

- be the responsibility of Mitsubishi Electric.
- (2)Lost opportunity or lost profit incurred by the user due to a failure of a Mitsubishi Electric product.
- (3)Special damage or secondary damage, whether foreseeable or not, compensation for accidents, and compensation for damages to products other than Mitsubishi Electric products.
- (4)Replacement by the user, maintenance of on-site equipment, start-up test run and other tasks.

4. Changes in Product Specifications

Specifications shown in our catalogs, manuals or technical documents are subject to change without notice.

5. Product Application

- (1)For use of this product, applications should be those that will not result in a serious damage even if a failure or malfunction occurs in the product, and a backup or fail-safe function should operate on an external system when any failure or malfunction occurs to the product.
- (2)Mitsubishi Electric CNC is designed and manufactured solely for applications to machine tools for industrial purposes. Do not use this product in applications other than those specified above, especially those which have substantial influence on public interest or which are expected to have significant influence on human lives or properties.

\* Trademarks  
MELSEC, CC-Link, CC-Link/LT and CC-Link IE are either trademarks or registered trademarks of Mitsubishi Electric Corporation in Japan and/or other countries.  
Android is a trademarks of Google LLC.  
EtherNet/IP is a trademarks of ODVA, Inc.  
Microsoft® and Windows® are either trademarks or registered trademarks of Microsoft Corporation in the United States and/or other countries.  
The SD logo and SDHC logo are either registered trademarks or trademarks of SD-3C, LLC.  
PROFIBUS-DP is a trademark of Profibus International.  
QR Code is a trademark of DENSO WAVE Inc.  
VNC is a registered trademark of RealVNC Ltd. in the United States and other countries.  
Other company and product names that appear in this manual are trademarks or registered trademarks of the respective companies.  
In some cases, trademark symbols such as ™ or ® are not specified in this manual.

Creating Solutions Together.





Low-voltage Power Distribution Products



Transformers, Med-voltage Distribution Products



Power Monitoring and Energy Saving Products



Power (UPS) and Environmental Products



Compact and Modular Controllers



Servos, Motors and Inverters



Visualization: HMIs



Edge Computing Products



Numerical Control (NC)



Collaborative and Industrial Robots



Processing machines: EDM, Lasers



SCADA, analytics and simulation software

Mitsubishi Electric's product lineup, from various controllers and drives to energy-saving devices and processing machines, all help you to automate your world. They are underpinned by software, innovative data monitoring, and modelling systems supported by advanced industrial networking and Edgex IT/OT connectivity. Together with a worldwide partner ecosystem, Mitsubishi Electric factory automation (FA) has everything to make IoT and Digital Manufacturing a reality.

With a complete portfolio and comprehensive capabilities that combine synergies with diverse business units, Mitsubishi Electric provides a one-stop approach to how companies can tackle the shift to clean energy and energy conservation, carbon neutrality and sustainability, which are now a universal requirement of factories, buildings, and social infrastructure.

We at Mitsubishi Electric FA are your solution partners waiting to work with you as you take a step toward the realization of sustainable manufacturing and society through the application of automation. Let's automate the world together!

Note: not all products are available in all countries



# Global Partner. Local Friend.



[YouTube logo] is a trademark or registered trademark of Google LLC.

## Official Mitsubishi Electric Mechatronics YouTube account

User support videos are available, including how to backup/restore data and replace batteries, and an introduction to our products and technologies.



[Facebook logo] is a trademark or registered trademark of Meta Platforms, Inc.



[LinkedIn logo] is a trademark or registered trademark of LinkedIn Corporation.

## Official Mitsubishi Electric CNC Facebook/LinkedIn account

Visit our page for information about exhibitions, products, technologies, and FAQ.



## Safety Warning

To ensure proper use of the products listed in this catalog, please be sure to read the instruction manual prior to use.

**MITSUBISHI ELECTRIC CORPORATION**

HEAD OFFICE: TOKYO BLDG., 2-7-3 MARUNOUCHI,  
CHIYODA-KU, TOKYO 100-8310, JAPAN